







**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

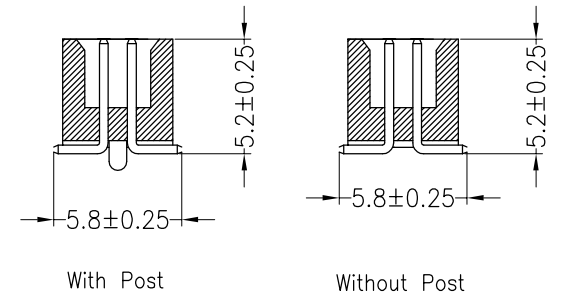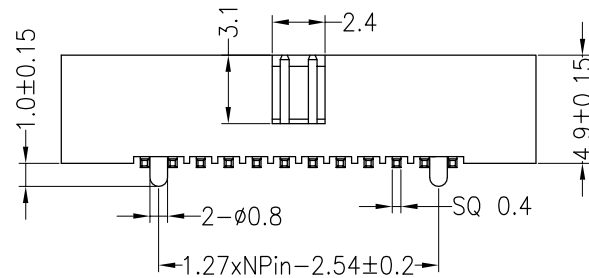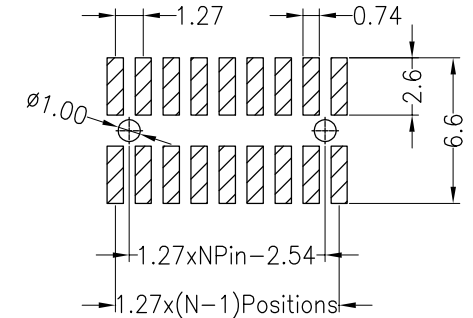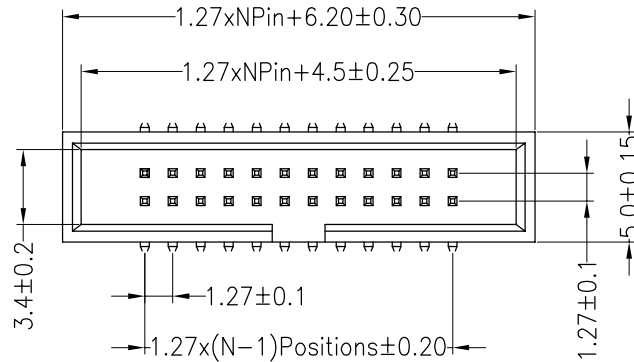

**Ordering Information**

**3230 XX M XX X B K00 X OX**

No.of Pins 10-100P	Contact Plating G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin	Insulator Material Option C=PA6T D=PA46 E=PA9T F=LCP	Packing O=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap	Stream code 01~99
-----------------------	---	--	---	----------------------

				OPERATION		DRAW	Liu Miao	14.10.18	SCALE	FIT	<b>WFD</b> 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD	
				X.X	±0.30				UNIT	mm		
B	2014.10.18	change terminal L=6.8mm → L=7.0mm		X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3230XXMXXXBK00X0X
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:	1.27Box Header Npin H4.9 SMT L=7.0mm
REV	DATE	MODIFICATION DESCRIPTION		ANGLE	±3°		DIM	TOL	PROJ.			
1	2	3	4	5	6	7	8	9				