





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

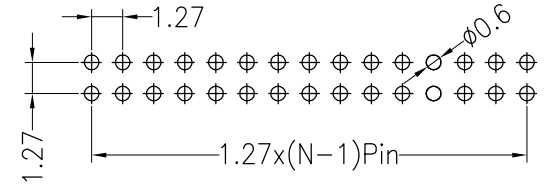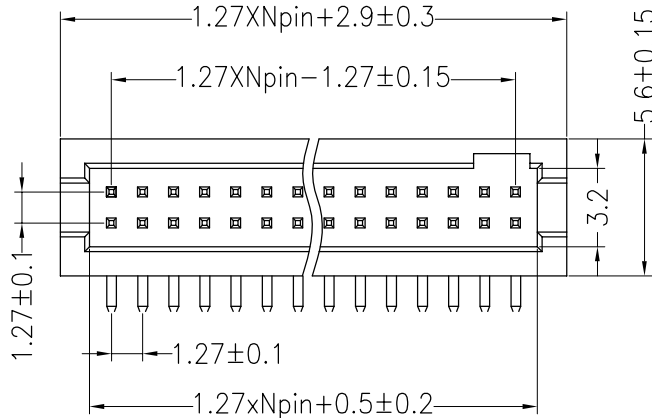

Ordering Information

3232 XX R XX X B K00 X 0X

- No.of Pins: 10-100P
- Contact Plating: G1:Gold Flash, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Packing: 0=PE Bag, A=Tray, T=Tube

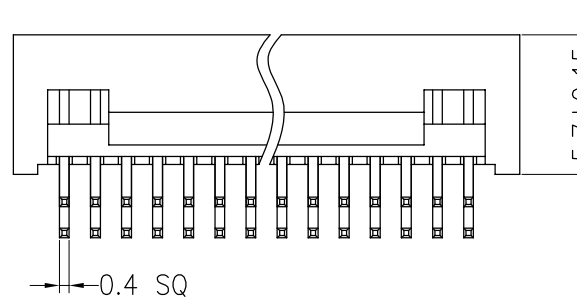

OPERATION		DRAW	Liu Miao	18.09.18	SCALE	FIT	WFD 深圳市旺富达电子有限公司 CONN SHEN ZHEN WFD ELECTRONICS CO., LTD
X.X	±0.30				UNIT	mm	
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10	APPROVE		SHEET	1/1		
Angle	±3°					PART NO.	3232XXRXXXBK00X0X
DIM	TOL					TITLE:	1.27Box Header Npin H5.7 90°

A0	2018.09.18	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE