
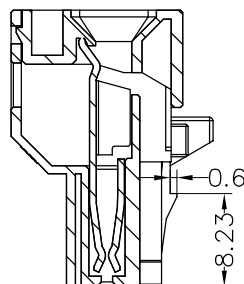
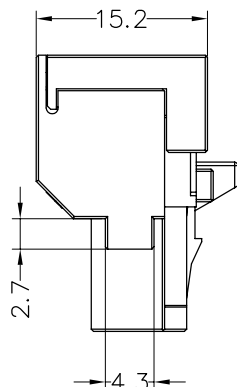


HSF RoHS




SPECIFICATIONS

Rated(额定参数): 300V,10A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):30mΩ Max
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PBT (UL94 V-0)
 Contact(端子): Phosphor bronze
 Plating:镀金2um/Ni



A-A SECTION



Ordering Information

WFD8EDGKH - 500 03 B X 2

- Pitch 500=5.0PH
- No.of pins 3P
- Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
- Packing
 0=Pe bag
 A=Tray
 T=Tube

				OPERATION		DRAW	LIU MIAO	19.03.06	SCALE	FIT	WFD 深圳市旺富达电子有限公司 CONN SHEN ZHEN WFD ELECTRONICS CO., LTD	
				X.X	±0.30				UNIT	mm		
				CHECK		APPROVE			SIZE	A4	PART NO.	WFD8EDGKH-50003BX2
				X.XX	±0.20				SHEET	1/1	TITLE:	5.0mm x 3P 公头 左开口
				X.XXX	±0.10	APPROVE			PROJ.			
A0	2019.03.06	NEW DRAWING		Angle	±3°							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							