
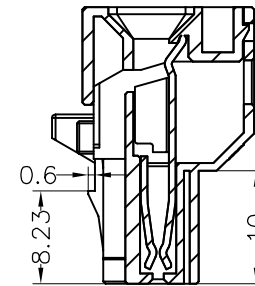
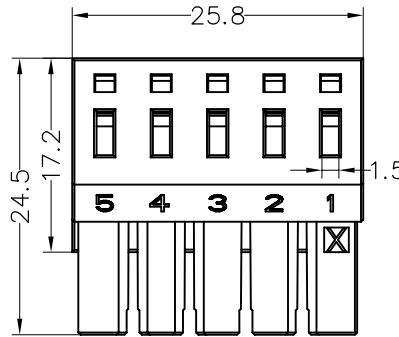
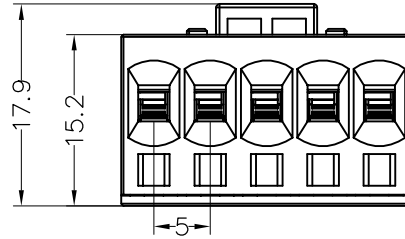


**HSF** RoHS


**SPECIFICATIONS**

Rated(额定参数): 300V,10A  
 Dielectric strength(抗电强度): AC2000V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):30mΩ Max  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PBT (UL94 V-0)  
 Contact(端子): Phosphor bronze  
 Plating:镀金2um/Ni



A-A SECTION



**Ordering Information**


**WFD8EDGKH - 500 05 B X 1**

Pitch  
500=5.0PH

No.of pins  
5P

Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey

Packing  
 O=Pe bag  
 A=Tray  
 T=Tube

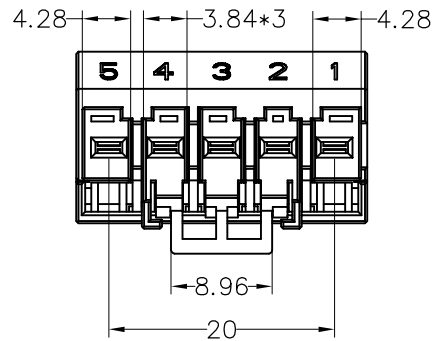

OPERATION		DRAW	LIU MIAO	18.06.14	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

**WFD** 深圳市旺富达电子有限公司  
 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO. **WFD8EDGKH-50005BX1**

TITLE: **5.0mm x 5P 公头 右开口**

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.06.14	NEW DRAWING	