

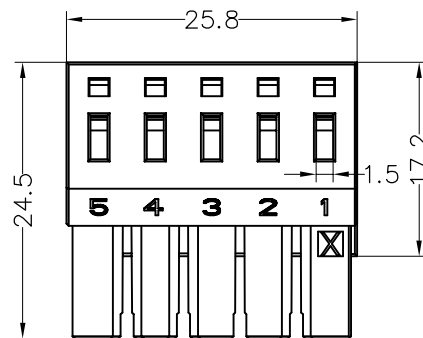
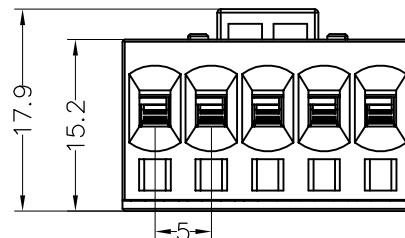



HSF RoHS

SPECIFICATIONS

Rated(额定参数): 300V,10A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):30mΩ Max
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PBT (UL94 V-0)
 Contact(端子): Phosphor bronze
 Plating:镀金2um/Ni



A-A SECTION

Ordering Information


WFD8EDGKH - 500 05 B X 2

Pitch
500=5.0PH

No.of pins
5P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Pe bag
 A=Tray
 T=Tube

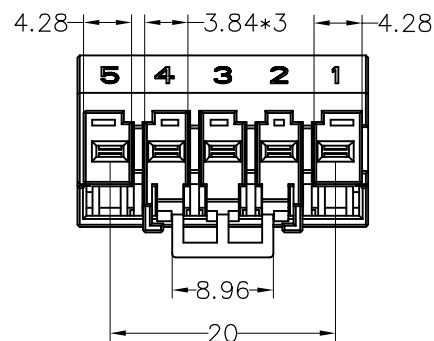

OPERATION		DRAW	LIU MIAO	18.08.08	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	

WFD 深圳市旺富达电子有限公司
 SHEN ZHEN WFD ELECTRONICS CO., LTD

A	A0	2018.08.08	NEW DRAWING	CHANGE
	REV	DATE	MODIFICATION DESCRIPTION	

PART NO.	WFD8EDGKH-50005BX2
TITLE:	5.0mm x 5P 公头 左开口