HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.12.16

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A

2.Withstanding voltage : AC2000V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.0mm, Poles : N=02~24P

3.Operating temperature: -40℃~+105℃

4.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

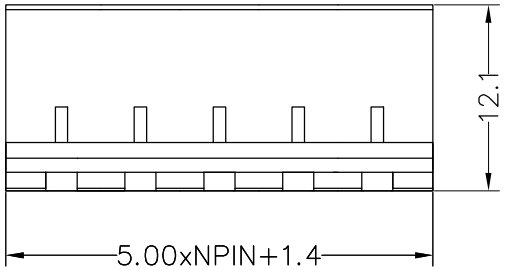

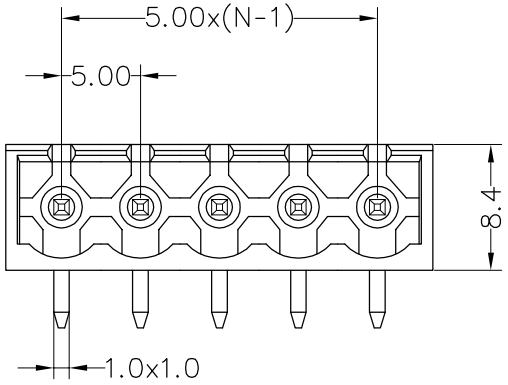

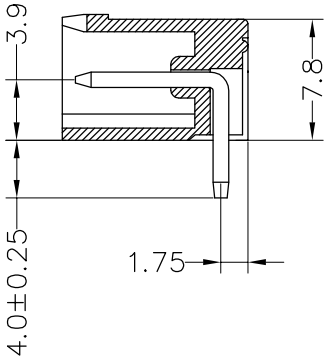

Ordering Information

WFD 2EDGRC - 500 XX G 0 1

Pitch	No.of pins	Housing Color	Packing
500=5.0PH	2P,3P,4P~12P	B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey	0=Pe bag T=Tube A=Tray

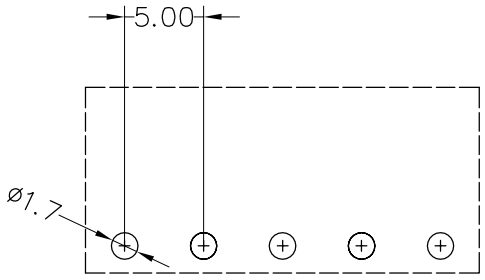

Recommended P.C.B Layout(Top Side)

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD2EDGRC-500XXG01
TITLE:	2EDGRC-5.0-XXP插拔式公座/弯脚/绿色