HSF RoHS

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.12.16

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A

2.Withstanding voltage : AC2500V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	20A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009


2.Pitch : 7.62mm, Poles : N=02~24P


3.Operating temperature: -40℃~+105℃


4.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

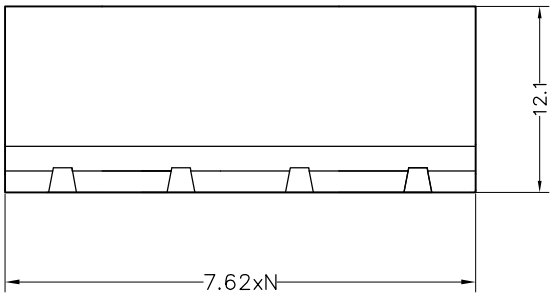

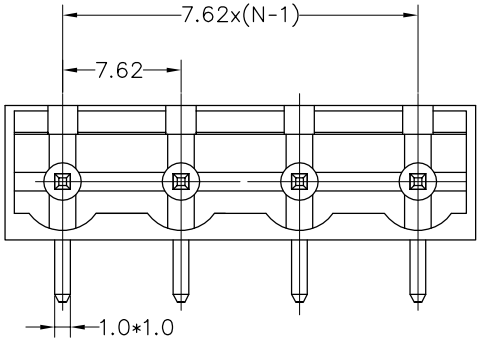

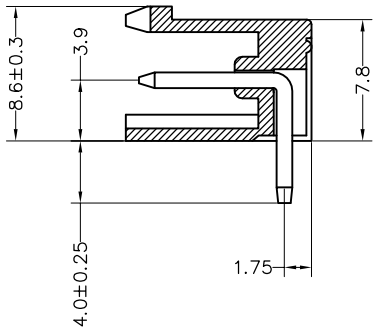

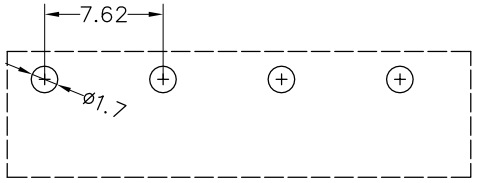

Recommended P.C.B Layout(Top Side)

Ordering Information

WFD 2EDGRC - 762 XX G 0 1

Pitch	No.of pins	Housing Color	Packing
760=7.62PH	2P,3P,4P~12P	B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey	0=Pe bag T=Tube A=Tray

DRAW	LIU MIAO	SCALE	FIT	WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD	
CHECK		UNIT	mm		
APPROVE		SIZE	A4	PART NO.	WFD2EDGRC-762XXG01
		SHEET	1/1	TITLE:	2EDGRC-7.62-XXP插拔式公座/弯脚/绿色
		PROJ.			