HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.12.16

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A

2.Withstanding voltage : AC2000V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	10A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.08mm, Poles : N=04~48P

3.Operating temperature: -40℃~+105℃

4.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ⌒ ⌓
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	∠ ±2°

5.RoHS Compliance

Ordering Information

WFD2EDGRH-508 XX G 01

- Pitch: 508=5.08PH
- No.of pins: 4P~48P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray, T=Tube

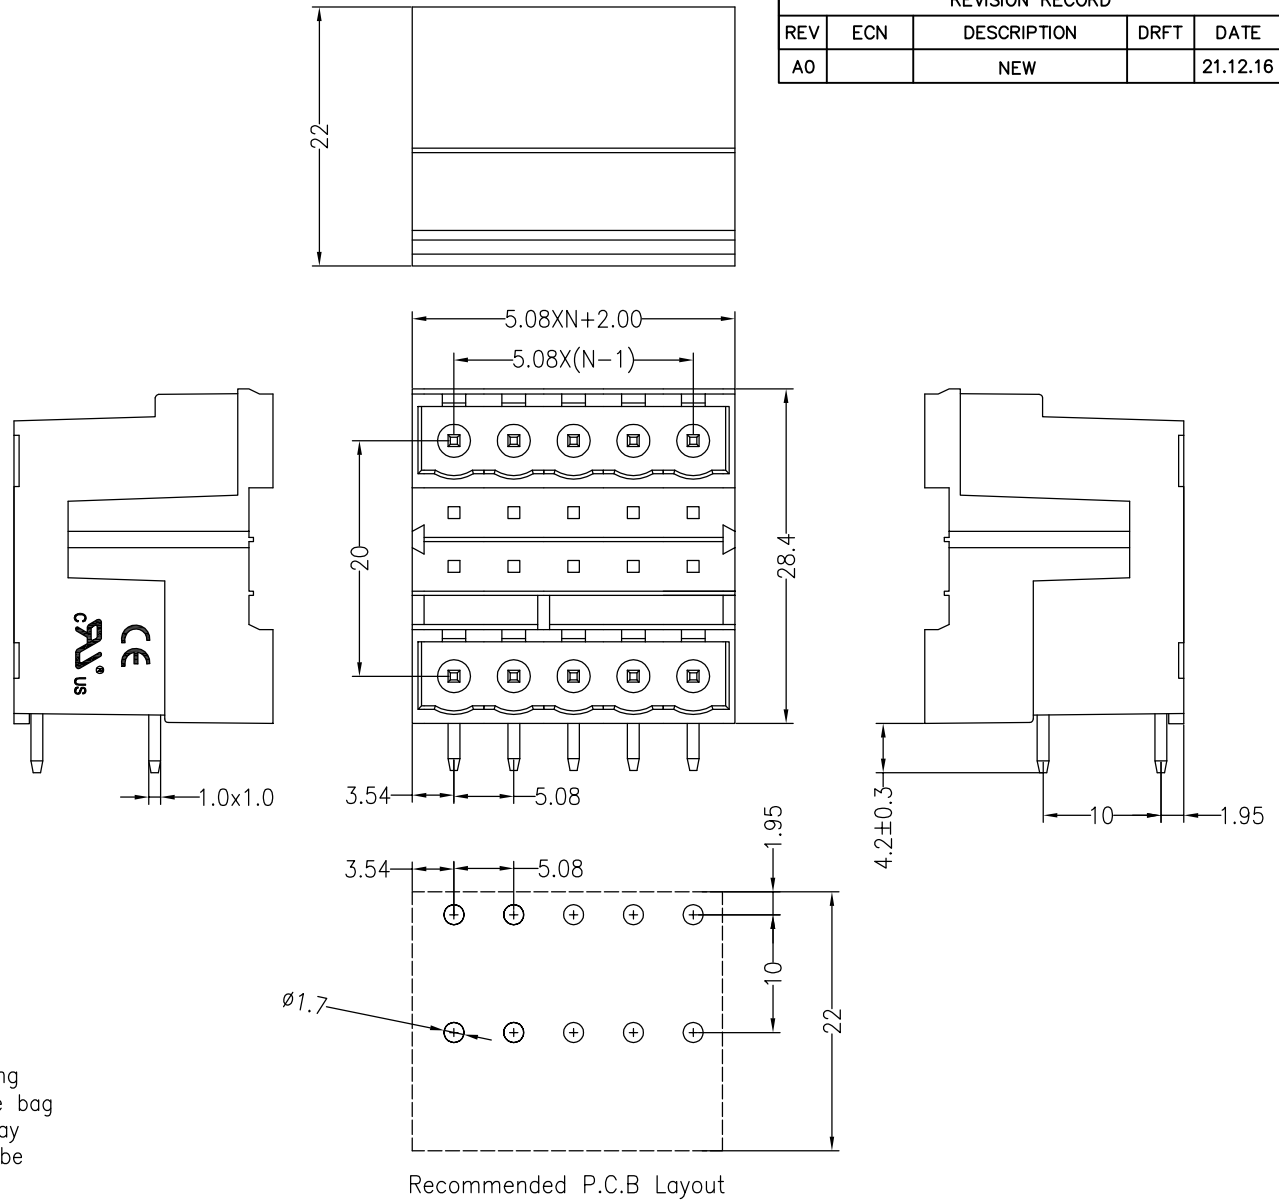

Recommended P.C.B Layout

DRAW	LIU MIAO	SCALE	FIT	WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD	
CHECK		UNIT	mm		
APPROVE		SIZE	A4	PART NO.	WFD2EDGRH-508XXG01
		SHEET	1/1	TITLE:	2EDGRH-5.08-2XNP插拔式公座/弯脚/绿色
		PROJ.			