

HSF RoHS cULus CE

SPECIFICATIONS
Rated(额定参数)：125V,4A
Dielectric strength(抗电强度)：AC1250V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Wire Range(线径):20~28AWG
Strip length(剥线长度):8mm
Temp. range(操作温度)：-40℃~+105℃
MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件)：PA66 (UL94 V-0)
Contact(端子)：Phosphor Bronze，Tin plating(磷铜镀镍)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

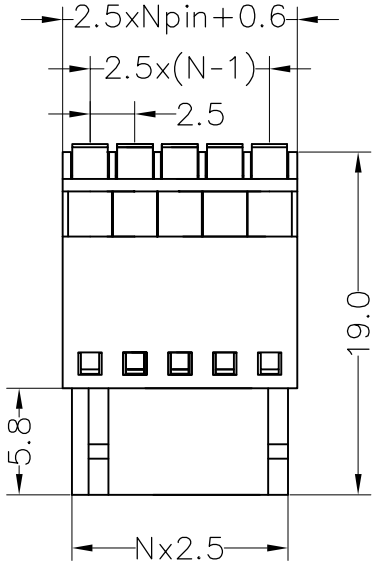


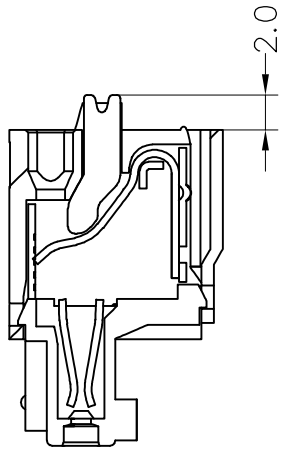


Ordering Information

WFD15EDGKD - 250 XX X X 1

- Pitch: 250=2.50PH
- No.of pins: 2P,3P,4P~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray



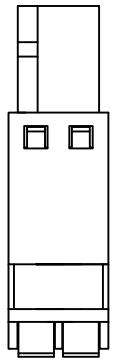

02P

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.05.22	NEW DRAWING	

OPERATION		DRAW	LIU MIAO	20.05.22
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD 15EDGKD-250XXXX1
TITLE:	2.50 Pitch Female Pluggable Terminal Blocks