HSF RoHS

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.3.3

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 5A

2.Withstanding voltage : AC1250V/1Min.

3.Wire range : 30~20AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2.Wire range : 0.2~0.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 2.54mm, Poles : N=04~48P


3.Stripping length : 7~8mm


4.Operating temperature: -40℃~+105℃


5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

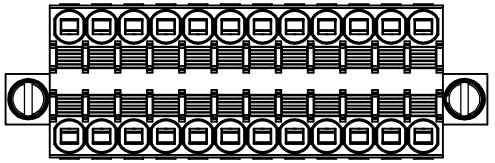

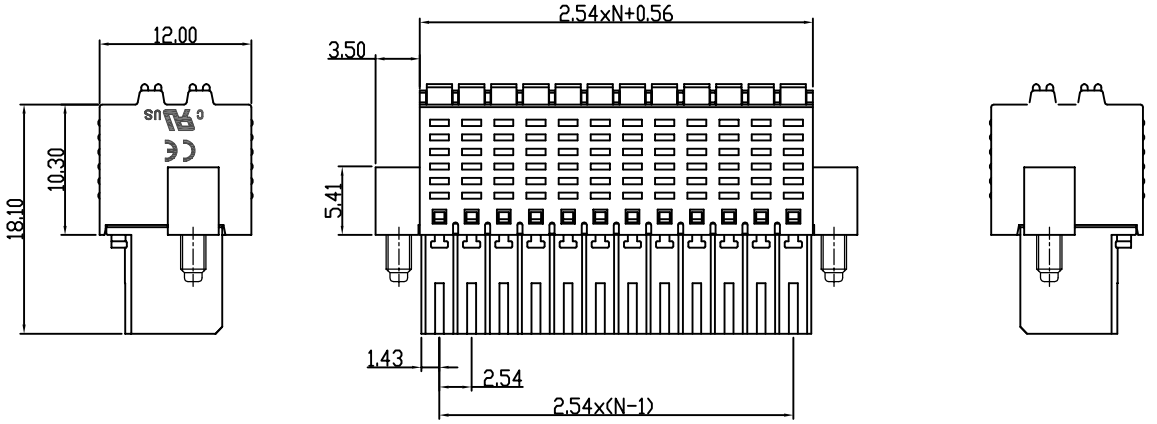

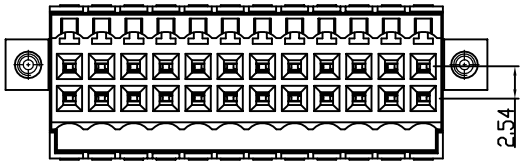

Ordering Information

WFD15EDGKDHM-254 XX B 0 1

- Pitch: 254=2.54PH
- No.of pins: 4P~48P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD15EDGKDHM-254XXB01
TITLE:	15EDGKDHM-2.54-2XNP插拔式母座/黑色/带耳