REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.3.31

HSF RoHS

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 10A
2.Withstanding voltage : AC1500V/1Min.
3.Torque value : M2 , 1.77Lb.in
4.Wire range : 26~14AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	160V
Rate current(A)	10A


2.Torque value : M2 , 0.2N·m
3.Wire range : 0.5~1.5mm²


NOTES2:


1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 3.96mm, Poles : N=02~12P
3.Stripping length : 7~8mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10 ∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

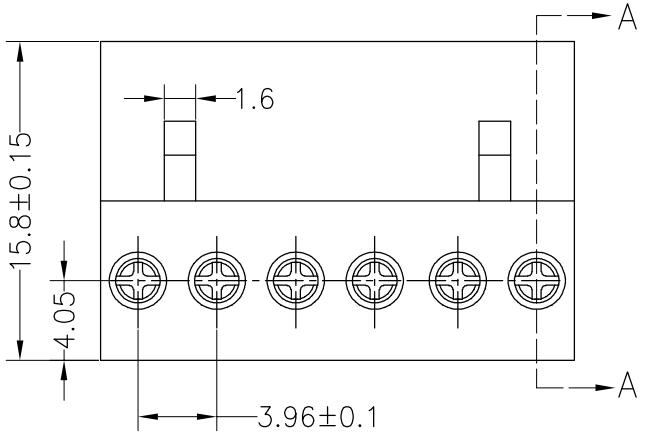

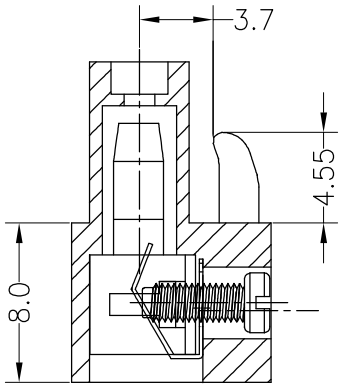

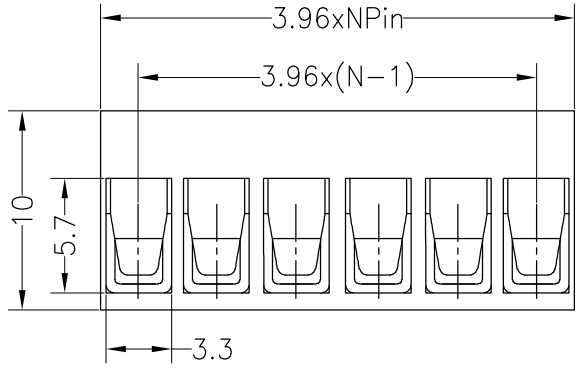

Ordering Information

WFD 396 - 396 XX G 01

- Pitch: 396=3.96PH
- No.of pins: 2P,3P,4P~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD396-396XXG01
TITLE:	396-3.96-XXP插拔式母座/绿色