HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.07.05

SPECIFICATIONS

Rated(额定参数)：300V,20A
Dielectric strength(抗电强度)：AC2000V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Screw Torque(扭矩)：0.4Nm (3.5Lb.in)
Wire Range(线径):16~22AWG
Temp. range(操作温度)：-40℃~+105℃
MAX Soldering(瞬时温度):+250°C,5s


Housing Material(塑件)：PA66 (UL94 V-0)
Contact(端子)：Brass，Tin plating(黄铜镀锡)
Screw (螺丝)：M2.5，Steel，Ni plating(钢,镀镍)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00


Ordering Information


WFD635 - 635 XX B 0 1


- Pitch: 635=6.35PH
- No.of pins: 2P~20P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

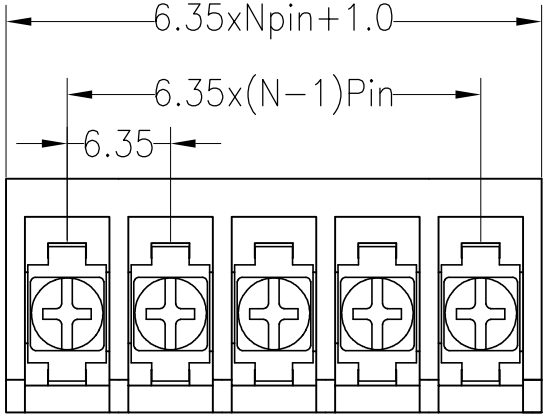

PCB LAYOUT

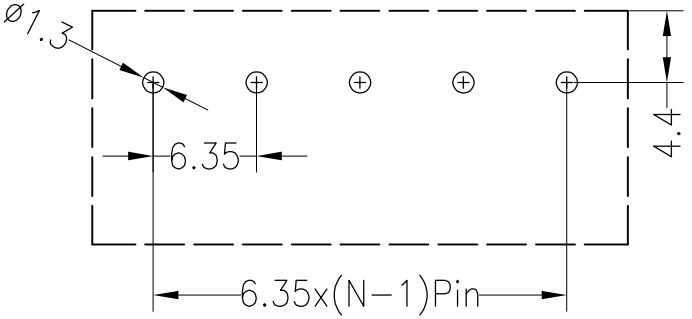

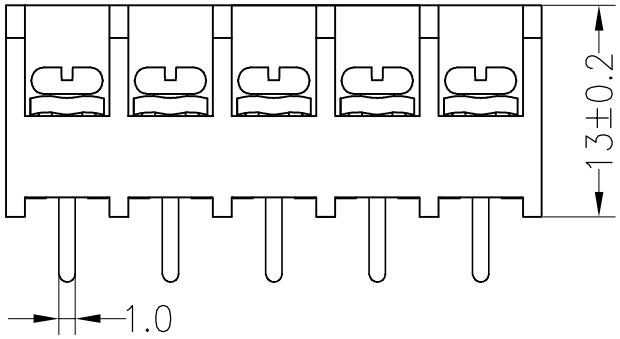

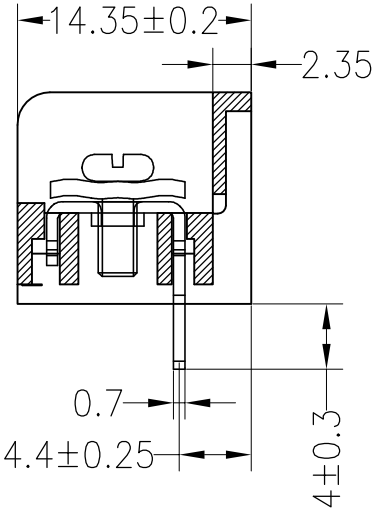

DRAW	LIU MIAO	SCALE	FIT
CHECK		UNIT	mm
APPROVE		SIZE	A4
		SHEET	1/1
		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD635-635XXB01
TITLE:	635-6.35-XXP栅栏式/黑色