REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

HSF RoHS cULus CE

NOTES1:


UL Standard


1. Rated Voltage/Current : 600V / 35A
2. Withstanding Voltage : AC4000V/1Min.
3. Screw Torsion : M3, 1.0Nm
4. Wire Range : 18~8AWG


NOTES2:


1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.5mm, Poles : N=02~24P
3. Stripping length : 8-10mm
4. Operating temperature : -40°C~+120°C
5. Undimensioned Toleronces:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
≤8	8 ~ 16	16 ~ 24	≤6	6 ~ 30	30 ~ 90	90 ~ 200	200 ~ 480	0.05/10 ∠
±0.08	±0.13	±0.18	±0.10	±0.20	±0.30	±0.50	±0.70	±1°

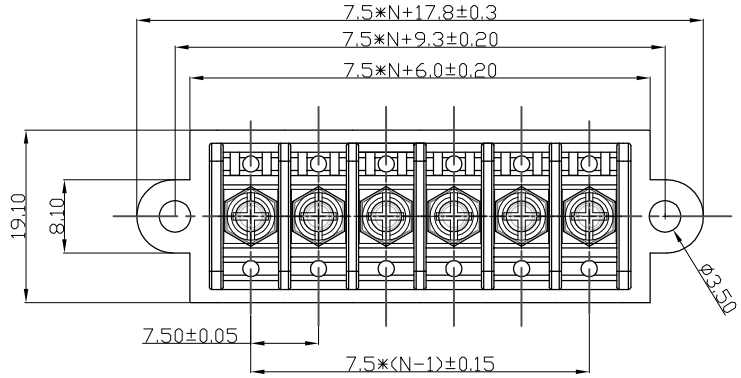

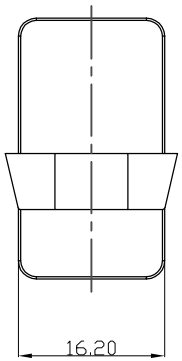

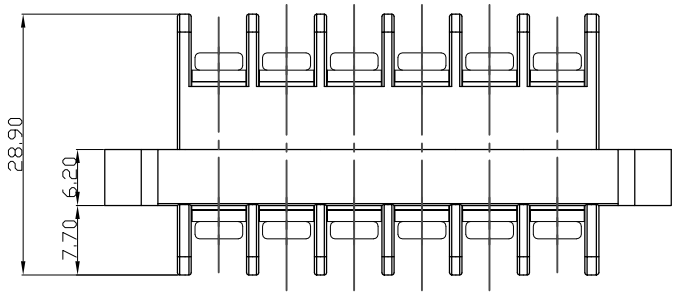



Ordering Information

WFD11 - 750 XX W 0 1

- Pitch: 750=7.50PH
- No.of pins: 2P~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray, T=Tube

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD11-750XXW01
TITLE:	11-7.5-栅栏式/PC/灰白色