HSF RoHS

NOTES1:

UL Standard

1.Rated voltage/current : 300V /15A
2.Withstanding voltage : AC2000V/1Min.
3.Torque value : M3 , 4.4Lb.in
4.Wire range : 22~14AWG(str)
5.Insulation Resistance : 1000MΩ Min
6.Contact Resistance : 20mΩ Max
7.Housing Material : PA66 (UL94 V-0)

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅱ
Rate impulse voltage(KV)	4KV
Rate voltage(V)	250V
Rate current(A)	24A

2.Torque value : M3 , 0.5N·m
3.Wire range : 0.5~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.62mm, Poles : N=02~24P
3.Operating temperature: -40℃~+105℃
4.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					− ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10 ∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°


5.RoHS Compliance


Ordering Information

WFD25S - 762 XX B 0 1

- Pitch: 762=7.62PH
- No.of pins: 2P~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

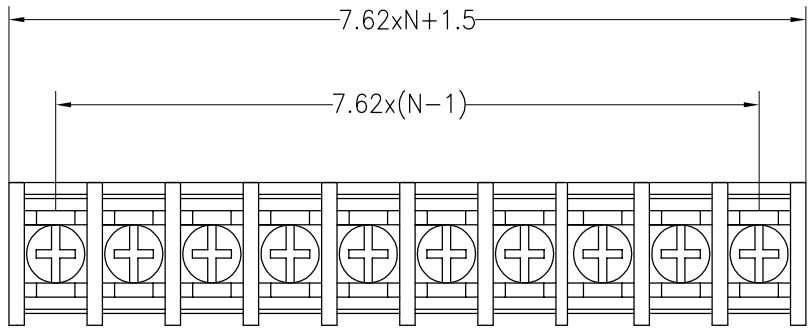

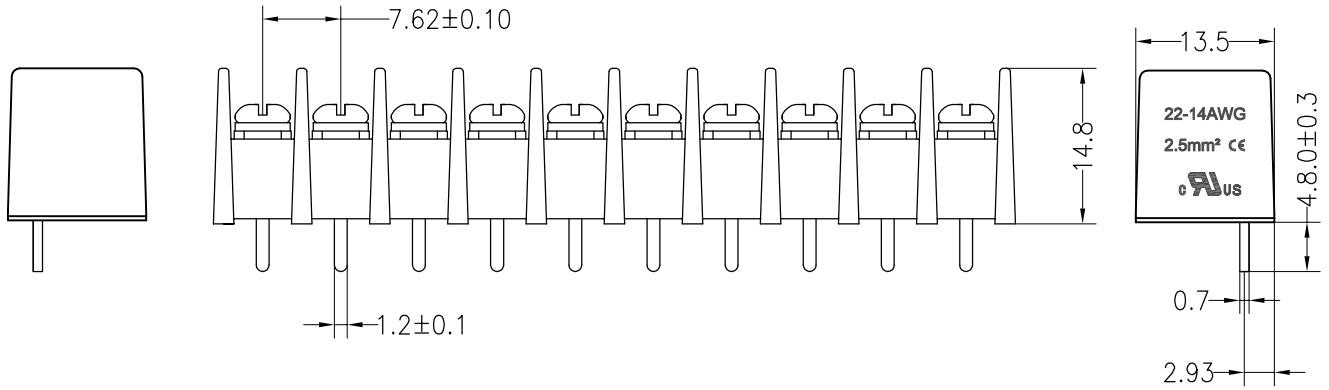

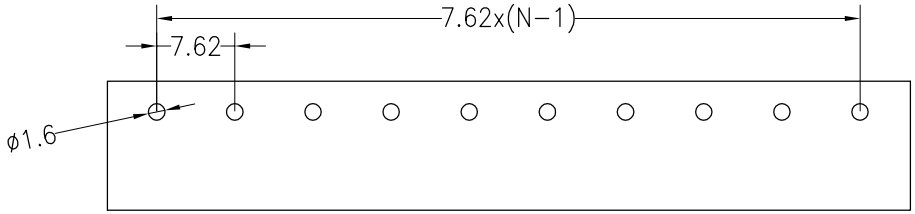

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD25S-762XXB01
TITLE:	25S-XXP栅栏式/黑色