
HSF RoHS


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.07.09


SPECIFICATIONS
Rated(额定参数)：300V,10A
Dielectric strength(抗电强度)：AC2500V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Impulse Withstand Voltage:3000V
Screw Torque(扭矩)：7.0Lb.in
Wire Range(线径):14~22AWG
Temp. range(操作温度)：-40℃~+105℃
MAX Soldering(瞬时温度):+250°C,5s


Housing Material(塑件)：PBT (UL94 V-0)
Contact(端子)：Phosphor bronze,
Plated:Gold Flash/Ni (磷铜镀半金镍)
Screw (螺丝)：M3.0, Steel, Ni plating(钢,镀镍)
hexagonal nut (六角螺母)：M3.0, Steel, Ni plating (钢, 镀镍)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

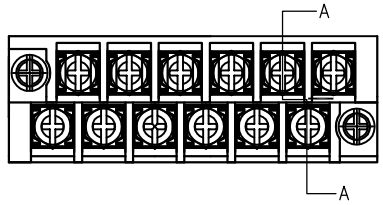


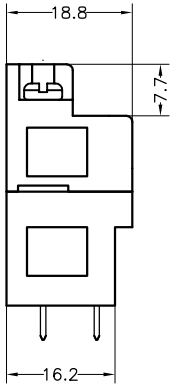


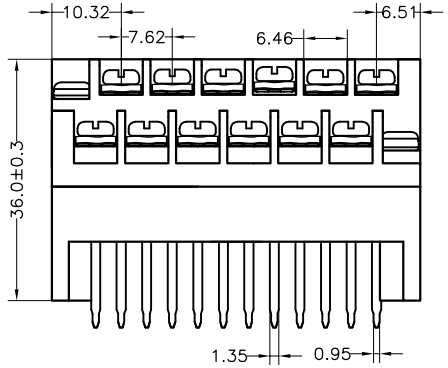

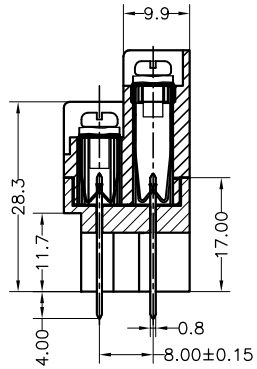

A-A SECTION

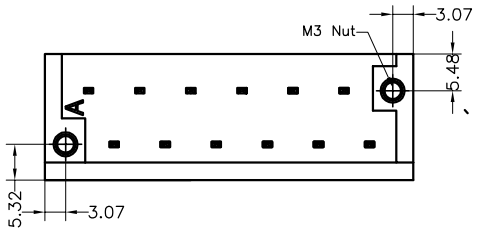

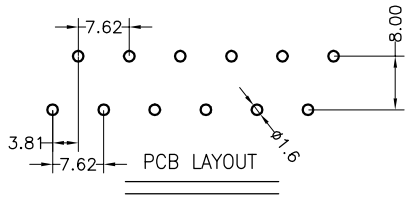

PCB LAYOUT

Ordering Information

WFD762D - 762 12 W 0 3

- 762: Pitch — 762=7.62PH
- 12: No.of pins — 2x6P
- W: Housing Color — B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- 0: Packing — 0=Pe bag, T=Tube, A=Tray
- 3

DRAW	LIU MIAO	SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD762D-76212W03
TITLE:	