

HSF RoHS cULus CE

SPECIFICATIONS
Rated(**额定参数**)：150V,10A
Dielectric strength(**抗电强度**)：AC1500V/1 Minute
Insulation Resistance(**绝缘电阻**):500MΩ Min
Contact Resistance(**接触电阻**):20mΩ Max
Screw Torque(**扭矩**)：0.2Nm（1.7Lb.in）
Wire Range(**线径**):26~16AWG
Strip length(**剥线长度**):5-6mm
Temp. range(**操作温度**)：-40℃~+105℃
MAX Soldering(**瞬时温度**):+250°C,5s

Housing Material(**塑件**)：PA66（UL94 V-0）
Contact(**端子**)：Brass，Tin plating(**黄铜镀锡**)
Wire protector(**弹片**)：Brass(**黄铜**)，Ni plating(**镀镍**)
Screw（**螺丝**)：M2.0，Steel，Zinc plating(**钢,镀锌**)

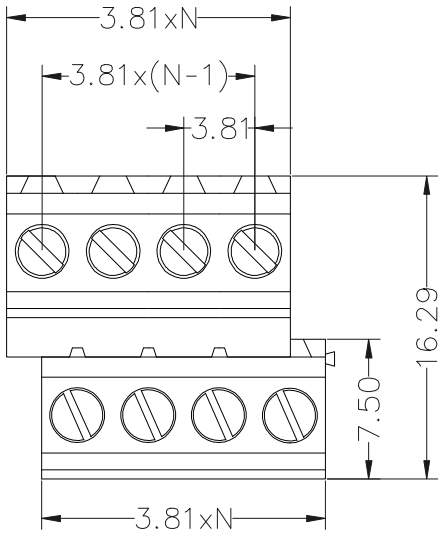


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

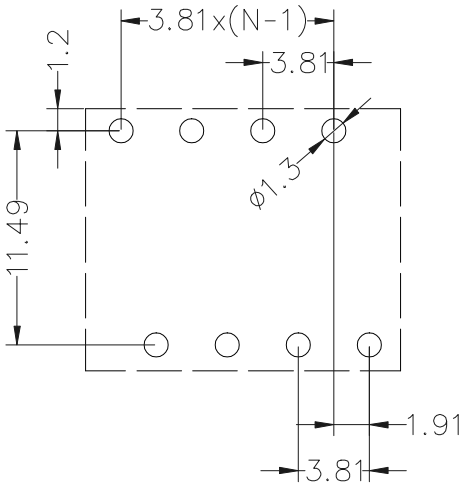



Ordering Information

WFD124DGA - 381 XX X X 1

- Pitch: 350=3.50PH; 381=3.81PH; 396=3.96PH
- No.of pins: 2P,3P,4P~12P
- Housing Color: B=Black; G=Green; U=Blue; R=Red; W=White; Y=Yellow; O=Orange; E=Grey
- Packing: 0=Pe bag; T=Tube; A=Tray

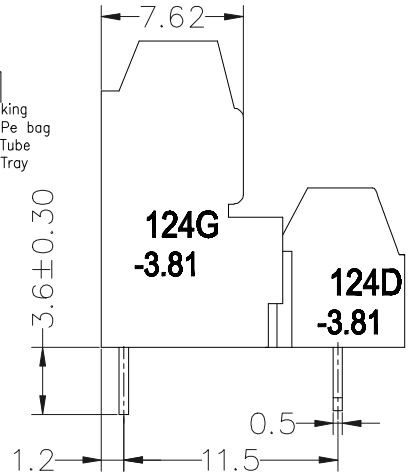

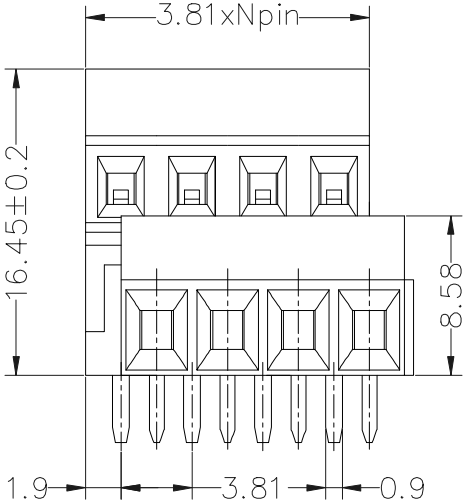

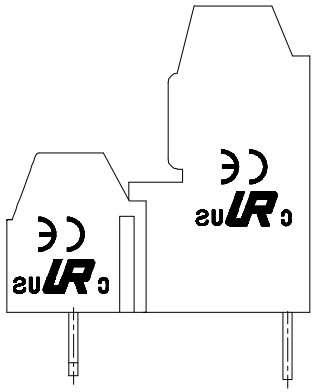

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	20.08.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	20.08.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD124DGA-381XXXX1
TITLE:	3.81mm Terminal Blocks Female 180°