HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.23

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 60A
2.Torque value : M4 , 10.53Lb.in
3.Wire range : 20~6AWG

IEC Standard


1.Rated voltage/current : 1000V/65A
2.Torque value : M4 , 1.2N·m
3.Wire range : 2.5~16mm²


NOTES2:


1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 12.7mm, Poles : N=02~12P
3.Stripping length : 10~11mm
4.Withstanding voltage : AC3500V/1Min
5.Operating temperature: -40℃~+105℃
6.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

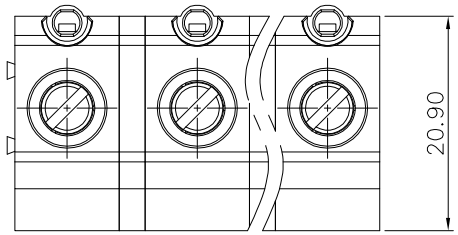

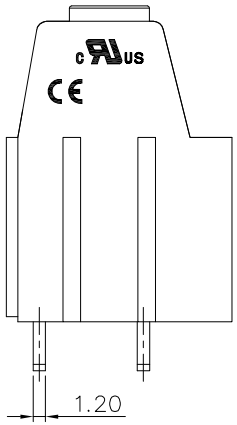

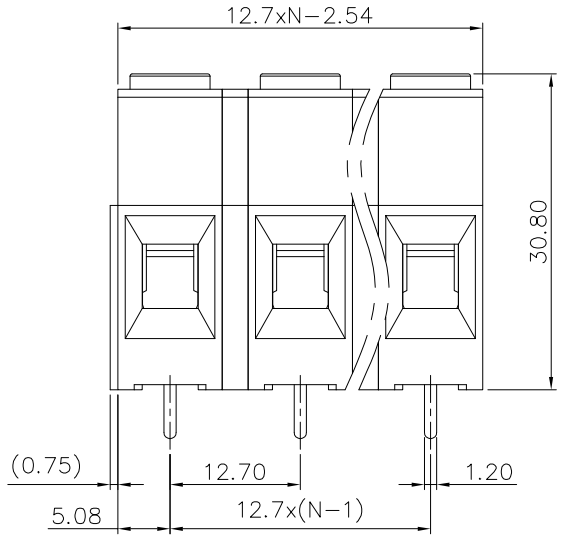


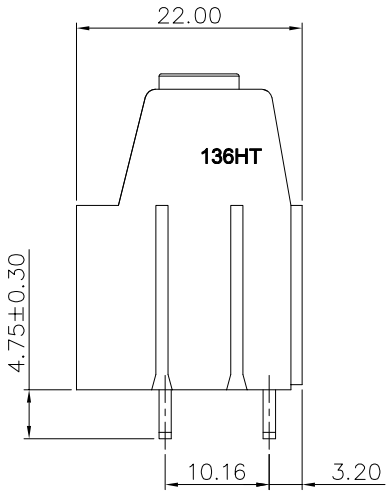

Ordering Information

WFD136HT- 127 XX G 0 1

- Pitch: 127=12.7PH
- No.of pins: 2P~12P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

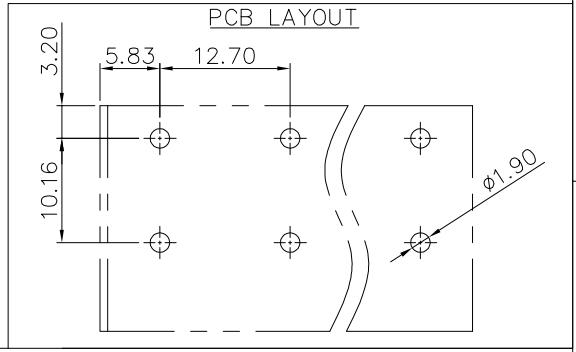

DRAW	Liu Miao	SCALE	FIT
		UNIT	mm
CHECK	SIMON	SIZE	A4
		SHEET	1/1
APPROVE	DAVID	PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD136HT-127XXG01
TITLE:	136HT-12.7-XXP螺钉式/绿色/一字螺丝