REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A1	A1	调整PC脚尺寸	Liu Miao	20.12.08


HSF RoHS cULus CE


SPECIFICATIONS


Rated(**额定参数**)：150V,6A
Dielectric strength(**抗电强度**)：AC1500V/1 Minute
Insulation Resistance(**绝缘电阻**):1000MΩ Min
Contact Resistance(**接触电阻**):20mΩ Max
Screw Torque(**扭矩**)：0.10Nm（0.89Lb.in）
Wire Range(**线径**):26~18AWG
Strip length(**剥线长度**):3.7-4.7mm
Temp. range(**操作温度**)：-40℃~+105℃
MAX Soldering(**瞬时温度**):+250°C,5s

Housing Material(**塑件**)：PA66（UL94 V-0）
Contact(**端子**)：Brass，Tin plating(**黄铜镀锡**)
Clamp(**方块**)：Brass/Steel(**铜/铁**)，Ni plating(**镀镍**)
Screw（**螺丝**)：M1.6，Steel，Zinc plating(**钢,镀锌**)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00



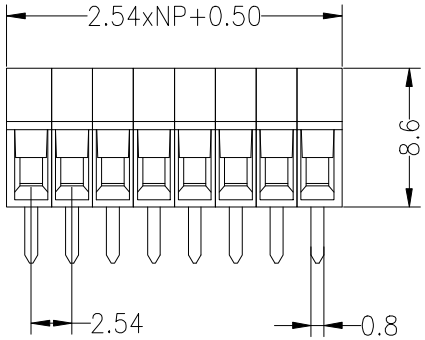


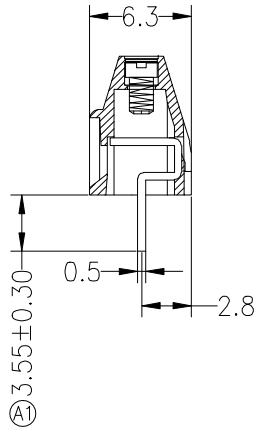

Ordering Information

WFD308-254 XX G X 1

- Pitch: 254=2.54PH
- No.of pins: 2P~12P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray, T=Tube

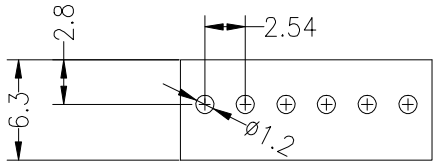

Recommended P.C.B Layout(Top Side)

DRAW	Liu Miao	SCALE	FIT
		UNIT	mm
CHECK	SIMON	SIZE	A4
		SHEET	1/1
APPROVE	DAVID	PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD308-254XXGX1
TITLE:	2.54mm Terminal Blocks Female