HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.03.25

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A
2.Withstanding voltage : AC2000V/1Min.
3.Torque value : M2.5 , 3.5Lb.in
4.Wire range : 26~14AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	4KV
Rate voltage(V)	250V
Rate current(A)	18A

2.Torque value : M2.5 , 0.4N·m

NOTES2:


1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.08mm, Poles : N=02~24P
3.Stripping length : 6~7mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					—	⌒	▱
	Over 6 TO 10	Over 10 TO 24		Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
TO 6			TO 30						∠	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		


6.RoHS Compliance


JL 500 - 508 XX B 0 4


- 508: Pitch — 508=5.08PH
- XX: No.of pins — 2P,3P,4P~24P
- B: Housing Color — B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- 0: Packing — 0=Pe bag, A=Tray, T=Tube

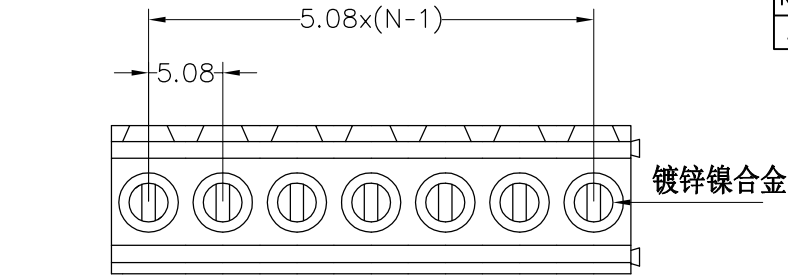




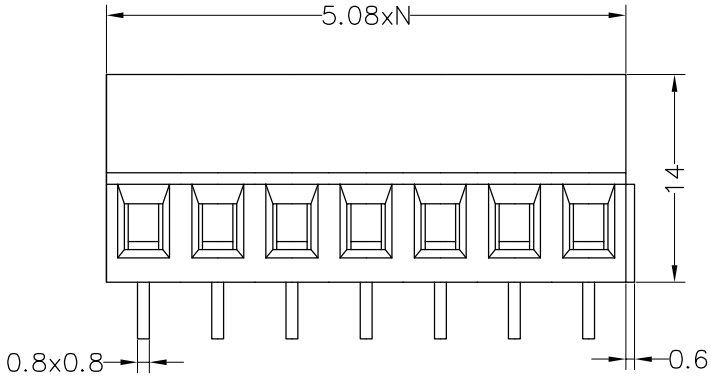

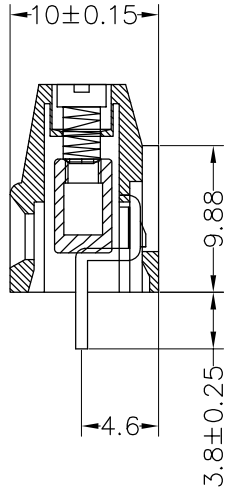



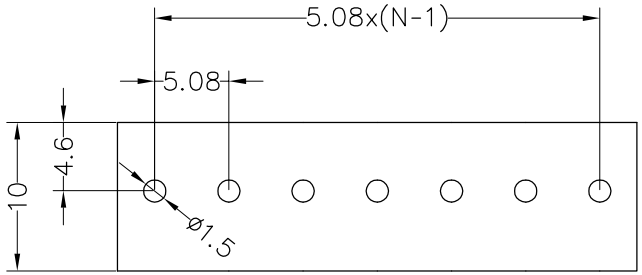

Recommended P.C.B Layout(Top Side)

DRAW	Liu Miao	SCALE	FIT	WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD	
		UNIT	mm		
CHECK	SIMON	SIZE	A4	PART NO.	WFD500-508XXB04
		SHEET	1/1		
APPROVE	DAVID	PROJ.		TITLE:	500-5.08-3P螺钉式/黑色/合金