HSF RoHS

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
B		更新旧图纸	Z.S.P	22.2.28

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 5A

2.Withstanding voltage : AC2000V/1Min.

3.Wire range : 26~20AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	Ⅲ
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	130V
Rate current(A)	6A

2.Wire range : 0.2~1.0mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 2.54mm, Poles : N=01~24P


3.Stripping length : 11mm


4.Operating temperature: -40℃~+130℃


5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°


6.RoHS Compliance

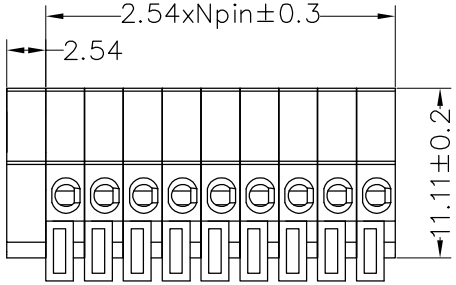



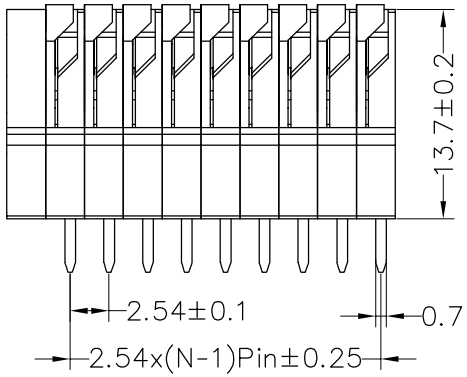

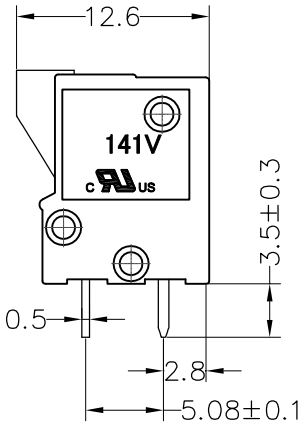

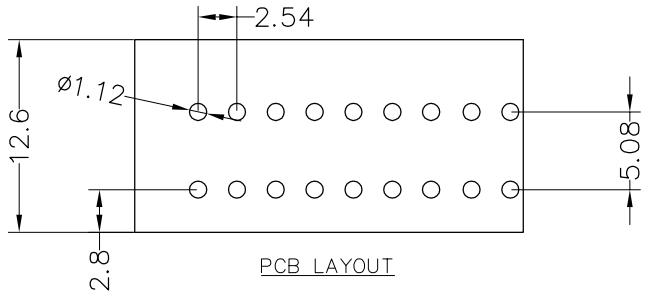

PCB LAYOUT

Ordering Information

WFD141V - 254 XX G A 1

- Pitch: 254=2.54PH
- No.of pins: 1P-XXP
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

DRAW		SCALE	FIT
		UNIT	mm
CHECK		SIZE	A4
		SHEET	1/1
APPROVE		PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD141V-254XXGA1
TITLE:	141V-2.54-XXP弹簧式/绿色