



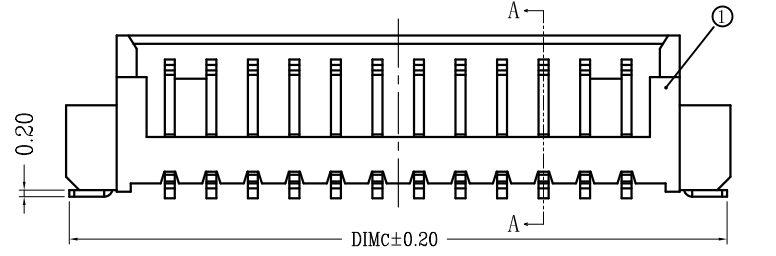
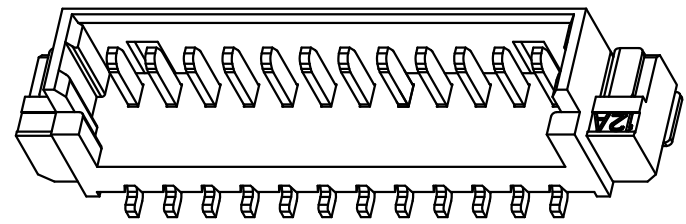
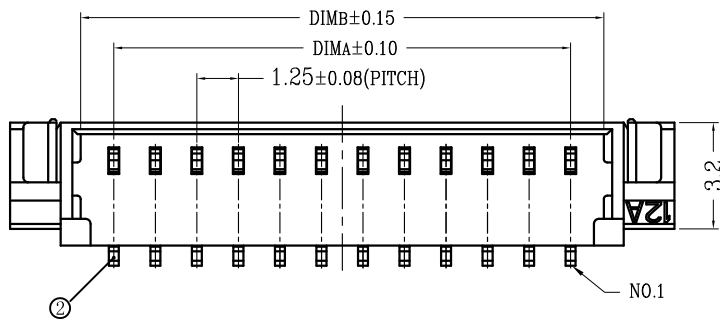


版次 (Edition)	变更摘要 (Change The Content)	日期 (Date)
0	新产品发行 (New Product Launch)	2015/1/28
1	设变胶芯壁与吸盖结构 (Plastic Core And Cap Structure)	2016/5/23

序号 (NO.)	品名 (Name)	材质 (Material)
①	A型立式WTB胶芯 1.25 Pitch S/T Wire To Board Housing (H=4.9)	LCP UL94V-0 本色 Natural
②	A型立式WTB端子 1.25 Pitch S/T Wire To Board Terminal (H=4.9)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	A型立式WTB焊片 1.25 Pitch S/T Wire To Board Fitting Nail (H=4.9)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

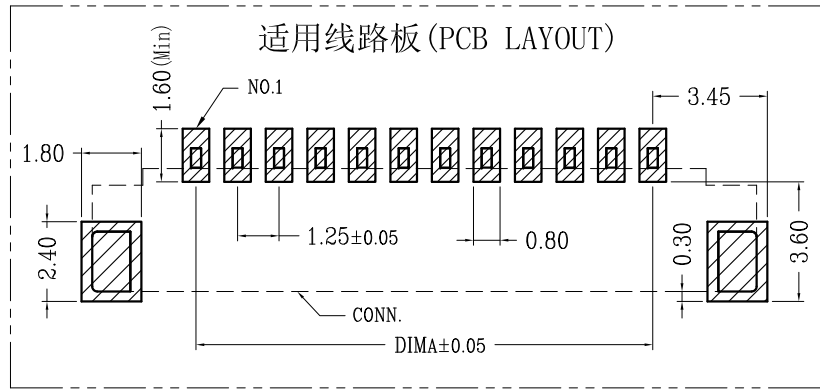


SECTION A-A

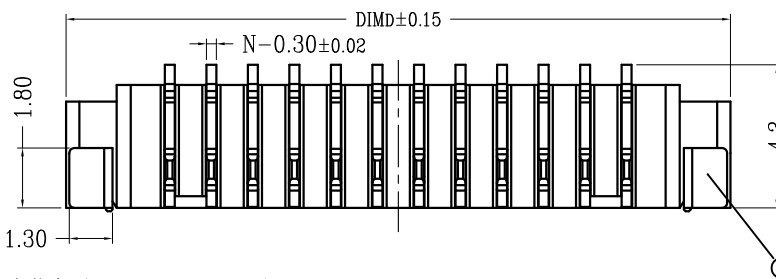

CKT	DIM A	DIM B	DIM C	DIM D
2	1.25	3.25	7.30	7.50
3	2.50	4.50	8.55	8.75
4	3.75	5.75	9.80	10.00
5	5.00	7.00	11.05	11.25
6	6.25	8.25	12.30	12.50
7	7.50	9.50	13.55	13.75
8	8.75	10.75	14.80	15.00
9	10.00	12.00	16.05	16.25
10	11.25	13.25	17.30	17.50
11	12.50	14.50	18.55	18.75
12	13.75	15.75	19.80	20.00
13	15.00	17.00	21.05	21.25
14	16.25	18.25	22.30	22.50
15	17.50	19.50	23.55	23.75
16	18.75	20.75	24.80	25.00
17	20.00	22.00	26.05	26.25
18	21.25	23.25	27.30	27.50
19	22.50	24.50	28.55	28.75
20	23.75	25.75	29.80	30.00

技术指标 (Technical Index):

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
- 锁扣窗口: 2~3PIN为1个, ≥4PIN为2个。(Lock Configuration: 2 to 3Pin is 1, ≥4Pin is 2)
- 不同Pin位吸盖加入/取出力有差异, 实属正常现象。(It is normal that there are differences between suction cap and suction cap at different Pin positions)
- 温度范围 (Temperature range): -25° C~85° C.
- 额定电压 (Rated voltage): 125V, AC/DC (=等效).
- 接触电阻 (Contact resistance): ≤0.02Ω.
- 绝缘电阻 (Insulation resistance): ≥100MΩ
- 产品料号 (Product material No.):

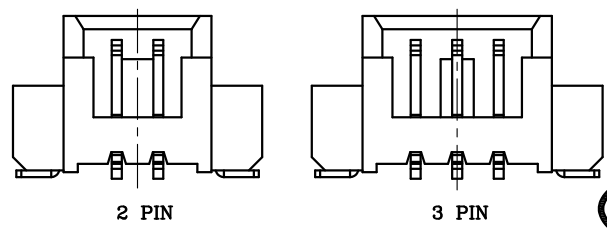

LOCK CONFIGURATION (锁扣位置)



一般公差 (TOLERANCE)
 X ±.50 XX ±.10
 X ±.20 XXX ±.05
 ANGLES ±1°

WFD-125AL—** * *—**
 NO OF CKT (产品PIN数) 0W 胶芯无LOGO (Housing without LOGO)
 Plating (电镀方式) Packing (包装方式)
 0: 端子全雾锡 (Terminal all mist tin) T: TUBE管装
 1: 端子全金 (Terminal G/F OVER ALL) R: TAPE & REEL卷装
 4: 端子全亮锡 (Terminal all bright tin)

WFD_{CONN} 深圳市旺富达电子有限公司
 SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE) 1.25 Pitch A型立式WTB
 1.25 PITCH H4.9 S/T WIRE TO BOARD SMT CONN.
 料号 (DWG.NO) WFD-125AL-024C-0W
 比例 (SCALE) 1:1 单位 (UNITS) mm

制图 (DR) LIU MIAO
 校对 (CHKD)
 审核 (APPD)
 张数 (SHEET) 1 OF 1 SIZE A4 REV A