HSF RoHS cULus CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.30

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 40A

2.Withstanding voltage : AC2200V/1Min.

3.Wire range : 24~8AWG

IEC Standard

1.

Pollution degree	2	2	3
Overvoltage category	Ⅱ	Ⅲ	Ⅲ
Rate impulse voltage(KV)	8KV	8KV	8KV
Rate voltage(V)	1000V	1000V	630V
Rate current(A)	41A		

2.Wire range : 0.2~6mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 7.50mm, Poles : N=02~24P


3.Stripping length : 14~15mm


4.Operating temperature: -40℃~+105℃


5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					— ∩ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10 ∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°


6.RoHS Compliance





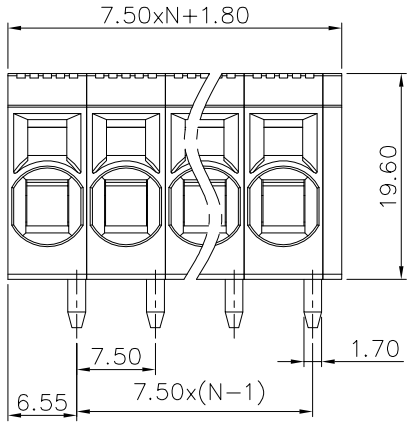

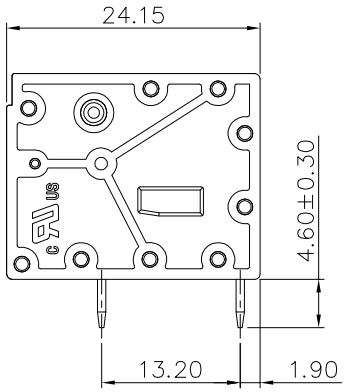

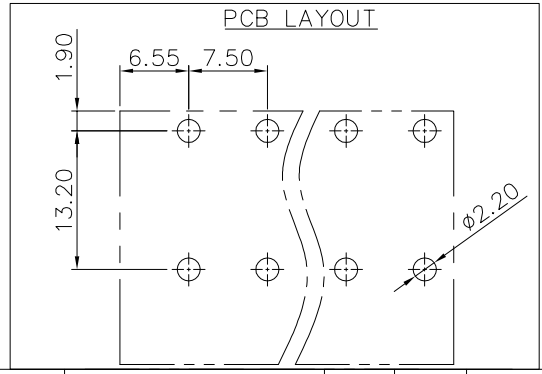

Ordering Information

WFD271R- 750 XX G 0 1

- 750: Pitch, 750=7.50PH
- XX: No.of pins, 2P~24P
- G: Housing Color, B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- 0: Packing, 0=Pe bag, T=Tube, A=Tray
- 1

DRAW	Liu Miao	SCALE	FIT
		UNIT	mm
CHECK	SIMON	SIZE	A4
		SHEET	1/1
APPROVE	DAVID	PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD271R-750XXG01
TITLE:	271R-7.5-XXP弹簧式/弯脚/双排/绿色