REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE


HSF RoHS


NOTES1:
UL Standard
1.Rated voltage/current : 300V / 14.5A
2.Withstanding voltage : AC1600V/1Min.
3.Wire range : 28~14AWG
4.Ratings : Use group B 300V AC/DC
Use group D 300V AC/DC


NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.0mm, Poles : N=02~14P
3.Stripping length : 8~9mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					⌒	⌓
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6.RoHS Compliance

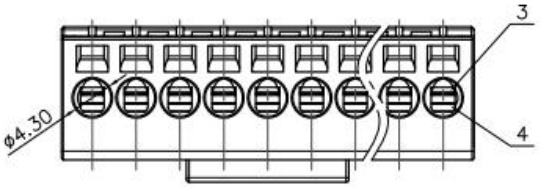



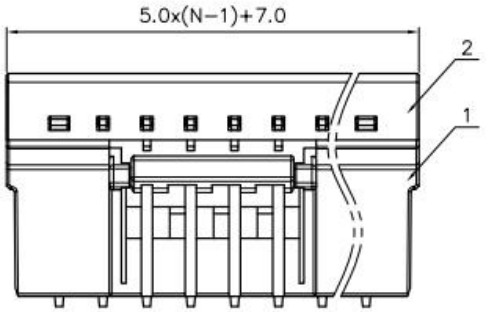




Ordering Information

WFD9EDGK - 500 XX B 0 1

- Pitch: 500=5.00PH
- No.of pins: 2P~15P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray, T=Tube

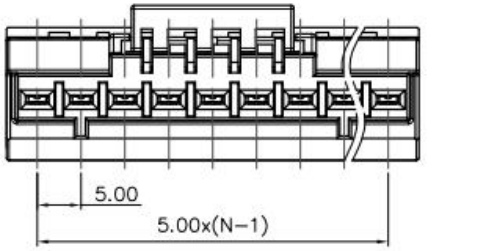

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless Steel	Sn/Au Plated
3	Clamp	Copper alloy	UL94V-0
2	Cover	PA66+GF	UL94V-0
1	Housing	PA66+GF	UL94V-0

DRAW	Liu Miao	SCALE	FIT
		UNIT	mm
CHECK	SIMON	SIZE	A4
		SHEET	1/1
APPROVE	DAVID	PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD9EDGK-500XXB01
TITLE:	9EDGK-5.0母端/接线端子台