HSF RoHS

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 16A
2.Withstanding voltage : AC1600V/1Min.
3.Wire range : 12~28AWG
4.Ratings :Use group B,C 300V AC/DC
Use group D 600V AC/DC

IEC Standard

1.

Pollution degree	2	2	3
Overvoltage category	Ⅱ	Ⅲ	Ⅲ
Rate impulse voltage(KV)	6KV	6KV	6KV
Rate voltage(V)	1000V	630V	500V
Rate current(A)	20A		

2.Wire range : 0.2~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.50mm, Poles : N=02~12P
3.Stripping length : 8mm
4.Operating temperature: -40℃~+105℃
5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm						
	Over 6 TO 10	Over 10 TO 24		Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		0.1/10
TO 6			TO 30						∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2°

6.RoHS Compliance


Ordering Information


WFD9EDGK - 750 XX B 0 1


- Pitch: 750=7.50PH
- No.of pins: 2P~15P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, A=Tray, T=Tube

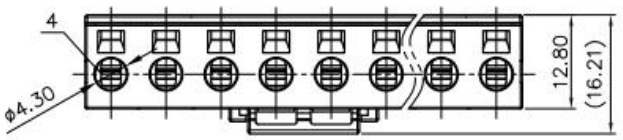




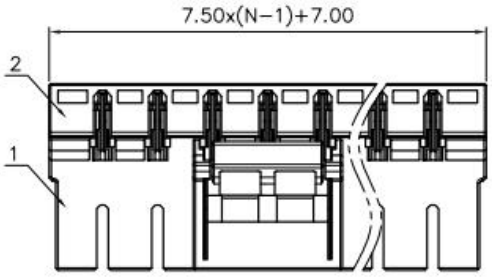



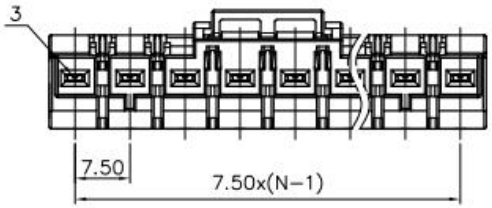

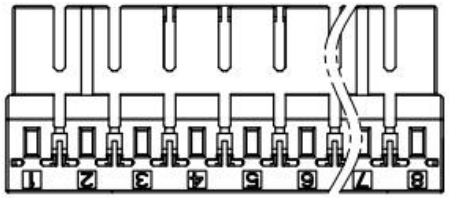

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless Steel	
3	Clamp	Copper alloy	Sn/Au Plated
2	Cover	PA66+GF	UL94V-0
1	Housing	PA66+GF	UL94V-0

DRAW	Liu Miao	SCALE	FIT
CHECK	SIMON	UNIT	mm
APPROVE	DAVID	SIZE	A4
		SHEET	1/1
		PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD9EDGK-750XXB01
TITLE:	9EDGK-7.5母端/接线端子台