
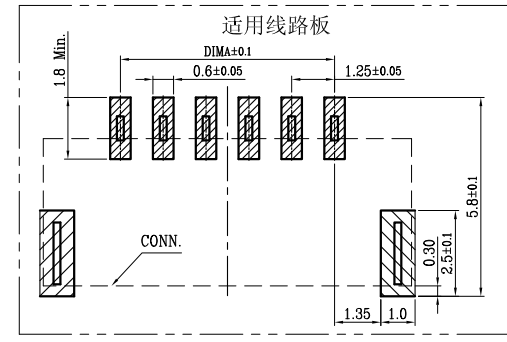

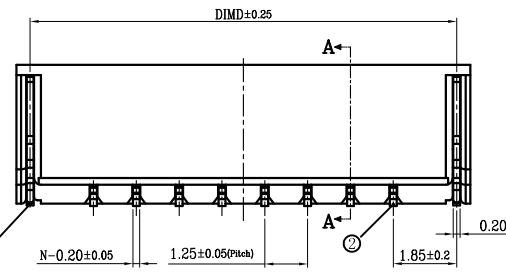
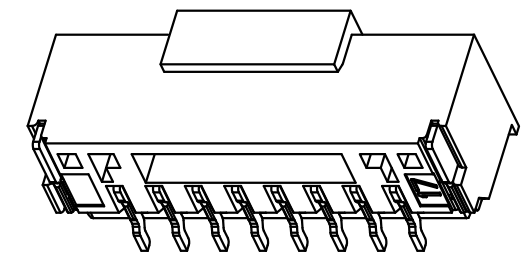




版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2017/2/10	①	1.25- H型卧式WTB胶芯	PA6T UL94V-0 米黄色
			②	1.25- H型立式WTB端子	铜合金/表面镀锡
			③	1.25- H型卧式WTB焊片	铜合金/表面镀锡
			④	1.25- H型立式WTB吸盖	LCP UL94V-0 自然色

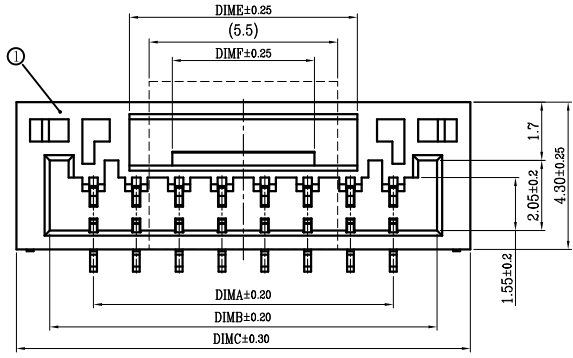

CKT	A	B	C	D	E	F
2	1.25	3.80	5.75	4.95	2.15	0.75
3	2.50	5.05	7.00	6.20	3.40	2.00
4	3.75	6.30	8.25	7.45	4.65	3.25
5	5.00	7.55	9.50	8.70	5.90	4.50
6	6.25	8.80	10.75	9.95	7.15	5.75
7	7.50	10.05	12.00	11.20	6.65	4.15
8	8.75	11.30	13.25	12.45	6.65	4.15
9	10.00	12.55	14.50	13.70	7.90	5.40
10	11.25	13.80	15.75	14.95	9.15	6.65
11	12.50	15.05	17.00	16.20	10.40	7.90
12	13.75	16.30	18.25	17.45	11.65	9.15
13	15.00	17.55	19.50	18.70	12.90	10.40
14	16.25	18.80	20.75	19.95	11.65	9.15
15	17.50	20.05	22.00	21.20	11.65	9.15
16	18.75	21.30	23.25	22.45	11.65	9.15

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
  2. 温度范围: -25° C~85° C.
  3. 额定电压: 50V AC, DC.
  4. 耐电压: 500V AC/minute.
  5. 接触电阻: ≤0.02Ω.
  6. 绝缘电阻: ≥100MΩ.
  7. 额定电流: 1A AC, DC.
  8. 产品料号:


WFD-125HL-\*\*\* \*\* \*-\*\*

NO OF CKT (产品PIN数) | Packing (包装方式)


Plating (电镀方式) | T: TUBE管装

1: 端子全金 (G/F OVERALL) | R: TAPE & REEL卷装


4: 端子全亮锡 | C: TAPE & REEL WITH COVER加吸盖卷装

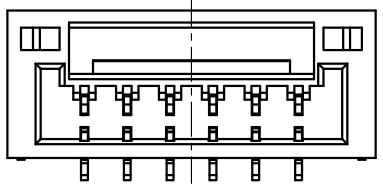

2~6 Pin

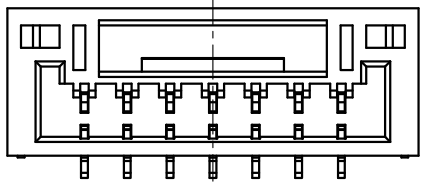

7 Pin

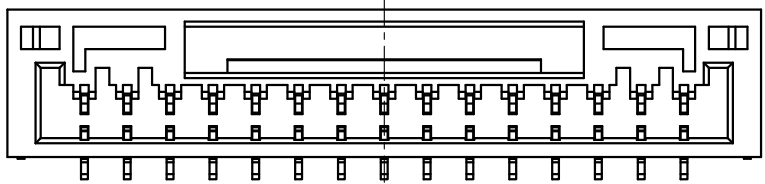

14~16 Pin



一般公差 (TOLERANCE)

X ±0.50 XX ±1.0

X ±0.20 XXX ±0.05

ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司  
SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE)	1.25 Pitch H型立式WTB	制图 (DR)	LIU MIAO
料号 (DWG.NO)	WFD-125HL-024C-0W	校对 (CHKD)	
比例 (SCALE)	1:1	审核 (APPD)	
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	A