REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE


HSF RoHS


NOTES1:
UL Standard
1.Rated voltage/current : 300V / 14.5A
2.Withstanding voltage : AC1600V/1Min.
3.Ratings :Use group B 300V AC/DC
Use group D 300V AC/DC


NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.0mm, Poles : N=02~14P
3.Operating temperature: -40℃~+105℃
4.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm					
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

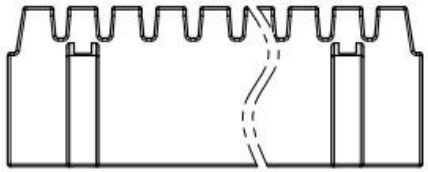



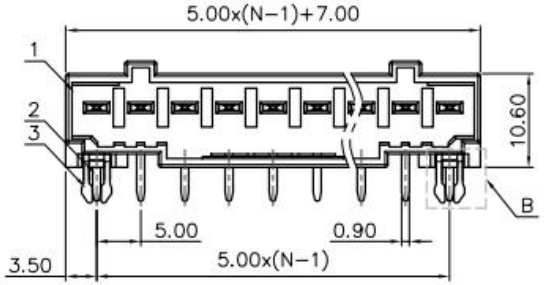






Ordering Information

WFD9EDGRC - 500 XX B 0 1

Pitch	No.of pins	Housing Color	Packing
500=5.00PH	2P~15P	B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey	0=Pe bag A=Tray T=Tube

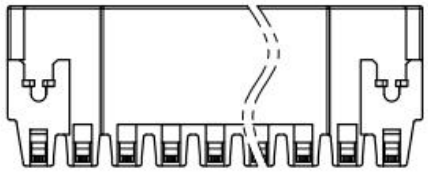



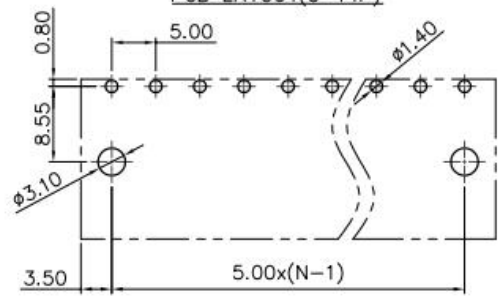

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin	Copper alloy	Sn Plated
3	Pin	Copper alloy	Sn Plated
2	Pin	Copper	Sn/Au plated
1	Housing	PA66+GF	UL94V-0

DRAW	Liu Miao	SCALE	FIT
CHECK	SIMON	UNIT	mm
APPROVE	DAVID	SIZE	A4
		SHEET	1/1
		PROJ.	

WFD 深圳市旺富达电子有限公司
CONN SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	WFD9EDGC-500XXB01
TITLE:	9EDGRC-5.0公端/接线端子台