

技术指标:

1. 工作温度:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ .
2. 额定电压: 200V DC/AC(rms).
3. 额定电流: 2.0A.
4. 接触电阻:  $\leq 20\text{m}\Omega$ .
5. 耐压值: 500V AC/minute.
6. 绝缘电阻:  $\geq 1000\text{M}\Omega$ .
7. 产品料号:

WFD-200FW—\*\* \* \*\*

NO OF CKT (产品PIN数)

Plating (电镀方式)



- 0: 端子全雾锡
- 1: 端子全金 (G/F OVERALL)
- 4: 端子全亮锡

Packing (包装方式)



- T: TUBE管装
- R: TAPE & REEL卷装

0W 胶芯无LOGO

编号	名称	材质
①	胶芯	LCP UL94V-0 Natural/Black
②	端子	Brass/Tin plating
③	焊片	Brass/Tin plating

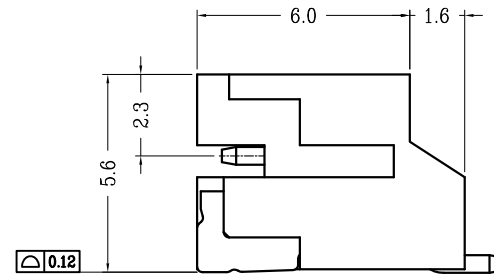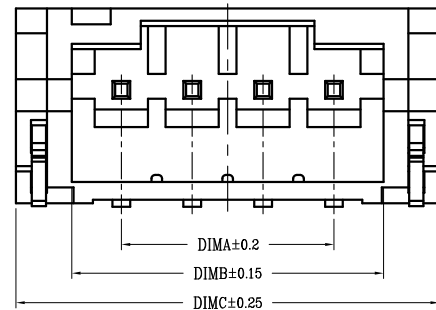

CKT	DIM A	DIM B	DIM C
2	2.00	4.80	7.95
3	4.00	6.80	9.95
4	6.00	8.80	11.95
5	8.00	10.80	13.95
6	10.00	12.80	15.95
7	12.00	14.80	17.95
8	14.00	16.80	19.95
9	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95

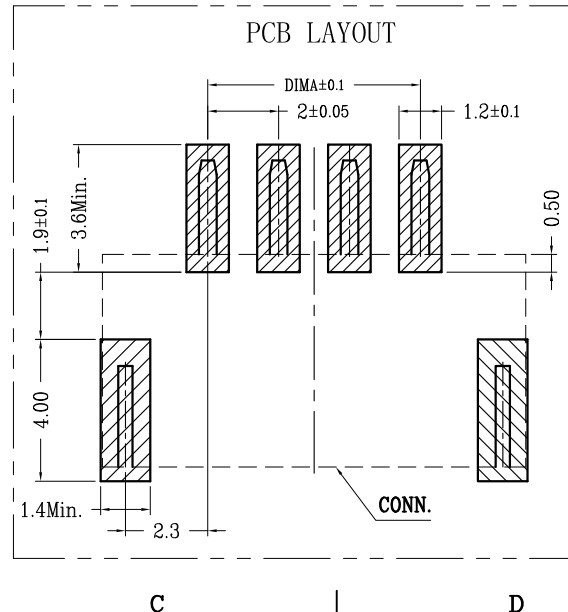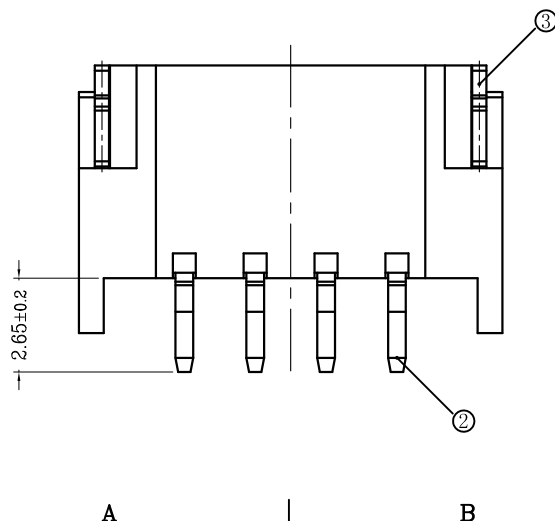

一般公差 (TOLERANCE)  
 X ±0.50 XX ±1.0  
 X ±2.0 XXX ±0.5  
 ANGLES ±1°

**WFDconn** 深圳市旺富达电子有限公司  
 SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE) 2.00 Pitch F TYPE R/A WAFER	制图 (DR) LIU MIAO
料号 (DWG.NO) WFD-200FW-024R-0W	校对 (CHKD)
比例 (SCALE) 1:1	审核 (APPD)
单位 (UNITS) mm	张数 (SHEET) 1 OF 1
尺寸 (SIZE) A4	版本 (REV) A