
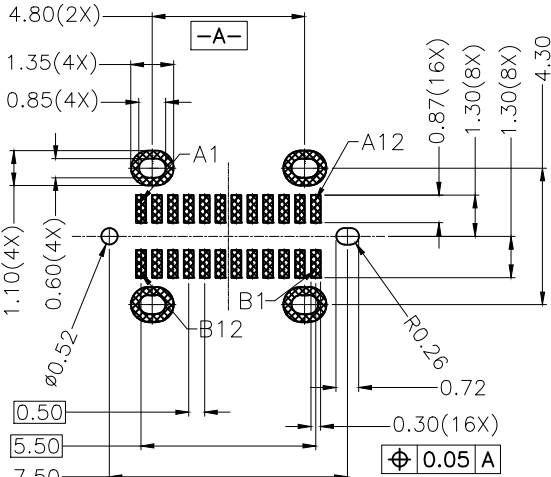
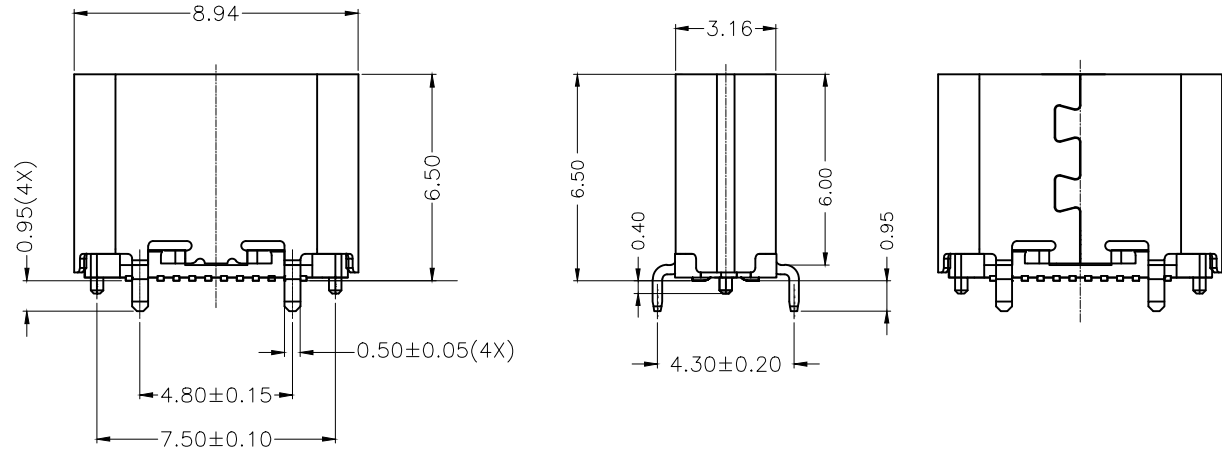


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			


NOTES:

SPECIFICATION:

- 1. CURRENT RATING: 5.0A MAX
- 2. VOLTAGE: 100 VAC
- 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
- 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
- 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 6. LNSERTION FORCE : 5N~20N
- 7. UNMATING FORCE: 8N~20N
- 8. DURABILITY: 10,000 CYCLES



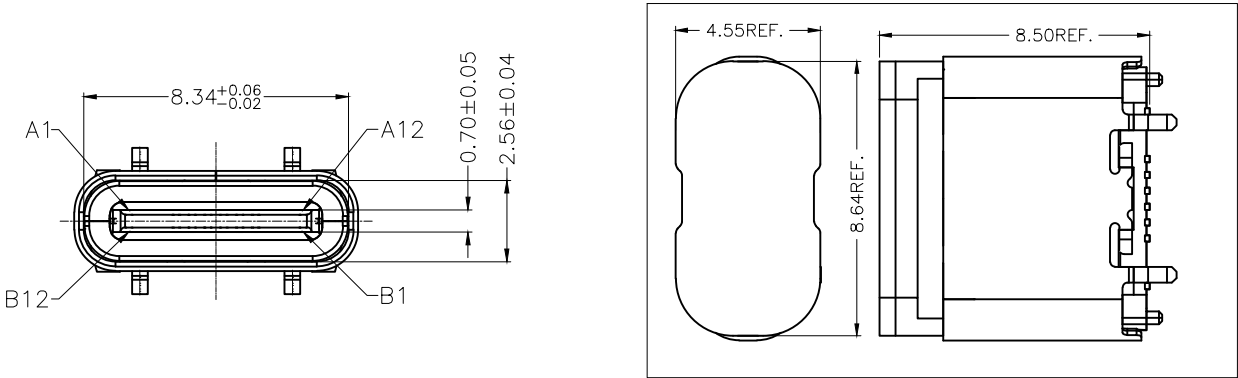


RECOMMENDED P.C.B. LAYOUT (T:0.80mm)
TOLERANCE UNSPECIFIED ±0.05mm

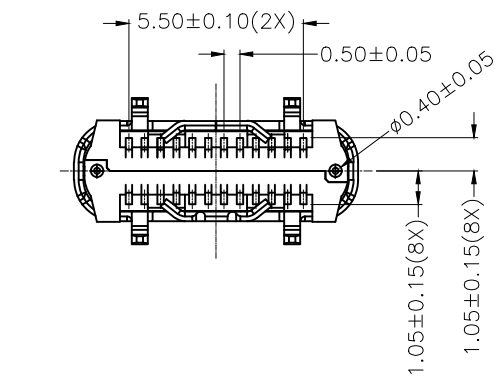

				5	COVER	LCP E130i	BLACK	1PCS		
A1	GND	B12	GND	4	HOUSING	LCP E130i	BLACK	1PCS		
A2	SSTXP1	B11	SSRXP1	3	SHELL	SUS 304 T=0.30	NI PLATED	1PCS		
A3	SSTXN1	B10	SSRXN1	2	SHIELDING PLATE	SUS301 T=0.15	---	1PCS		
A4	VBUS	B9	VBUS	1	CONTACT	C2680	Au/Ni Plated	1SET		
A5	CC1	B8	SBU2	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY		
A6	DP1	B7	DN2	TOLERANCE		NAME(INTENDED USE)	WFD 深圳市旺富达电子有限公司 conn SHEN ZHEN WFD ELECTRONICS CO.,LTD			
A7	DN1	B6	DP2			CUSTOMER DRAWING				
A8	SBU1	B5	CC2	X.X ±0.30	X.* ± 2°	PART NO.	TITLE:			
A9	VBUS	B4	VBUS	.XX ±0.20	.X.* ± 1°	USB-CF024LH-LT65SCW	C F 24P直立式 6.5 CONN.			
A10	SSRXN2	B3	SSTXN2	.XXX ±0.10	.XX.* ±0.5°					
A11	SSRXP2	B2	SSTXP2	UNITS	mm	APPD: DAVID	DRAWG NO.			
A12	GND	B1	GND	MATERILA		CHED: SIMON	UHO-051			
PIN	SIGNAL NAME	PIN	SIGNAL NAME	FINISH		DRAW: Liu Miao		SCALE	SHEET	REV.
								1:1	1/1	A

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版发行			2020.11.04

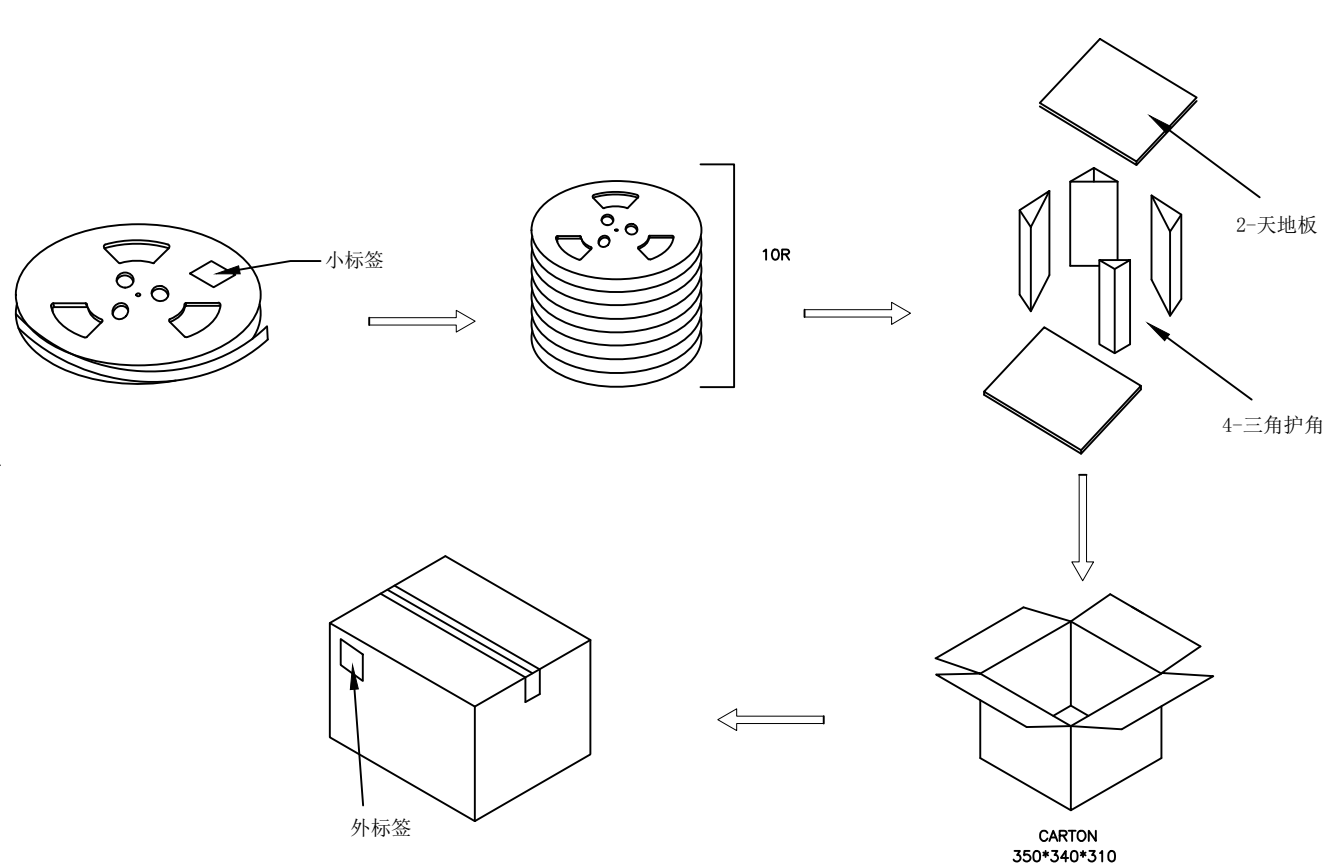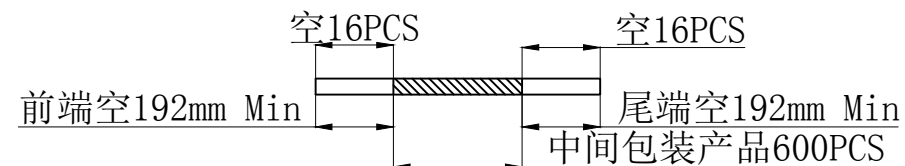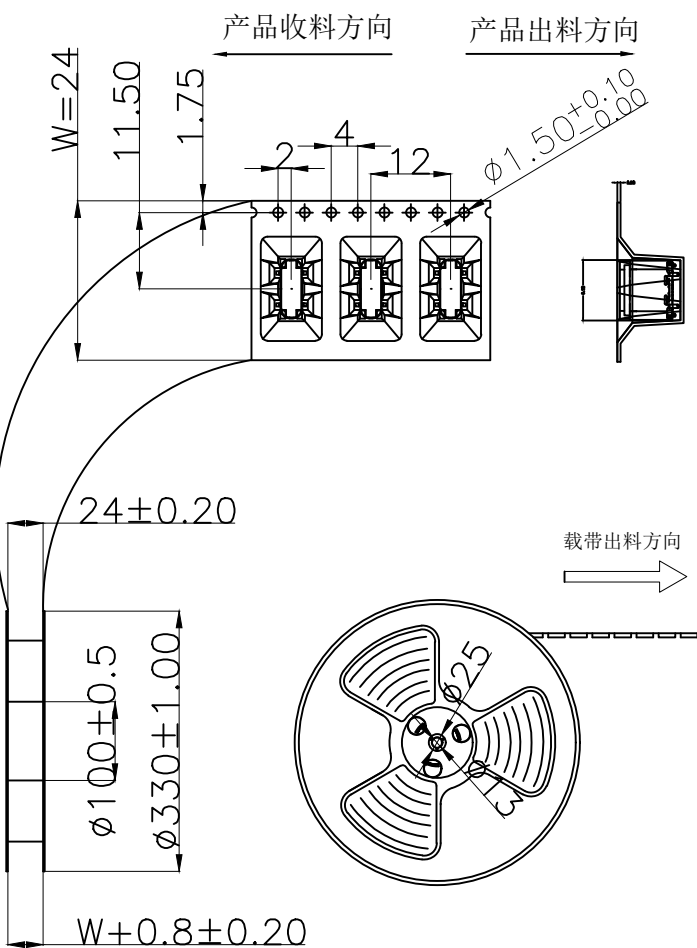

NOTE:

1. QUANTITY/REEL: 600 PCS
数量/卷: 600 PCS
QUANTITY/INNER CARTON: 600 X 10 = 6000 PCS
数量/箱: 600 X 10 = 6000 PCS
2. FREE 16 CAVE IN THE FRONT CARRIER AND FREE 16 CAVE IN THE END CARRIER.
包装带内圈空16格, 外圈空16格.

TOLERANCE		NAME(INTENDED USE) 包装规范	WFD 深圳市旺富达电子有限公司 conn SHEN ZHEN WFD ELECTRONICS CO.,LTD			
X. ±0.20	X.* ± 2°	PART NO.	TITLE:			
.X ±0.15	.X* ± 1°	USB—CF024LH—LT65SCW	C TYPE16P直立式6.5母座成品——包装规范			
.XX ±0.10	.XX* ±0.5°					
UNITS	mm	APPD: DAVID	DRAWG NO. PK—UH0—042			
MATERILA		CHECK: SIMON				
FINISH		DRAW: LIU MIAO		SCALE NONE	SHEET 2/2	REV. A