

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			2017.06.09

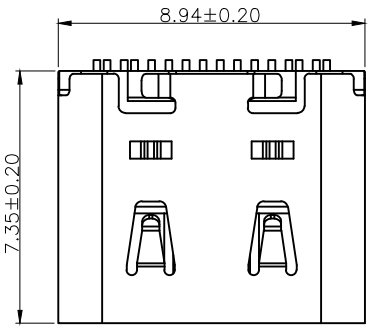


NOTES:

SPECIFICATION:


1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

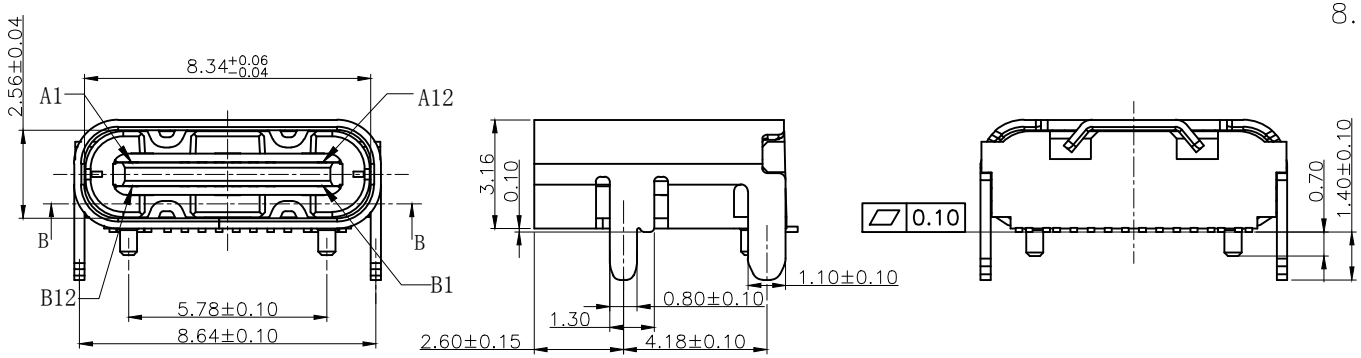

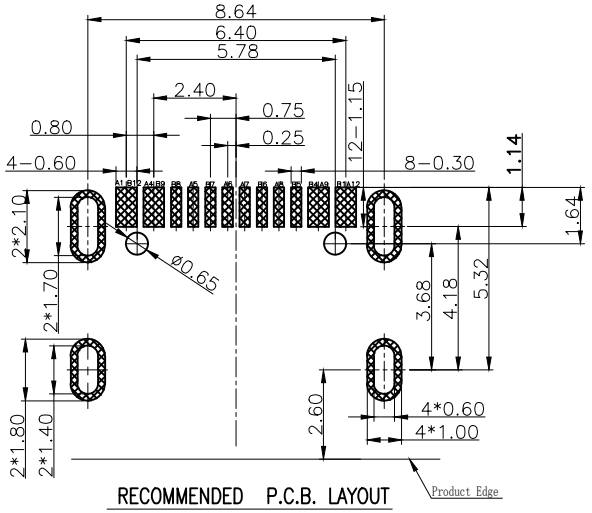

RECOMMENDED P.C.B. LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm

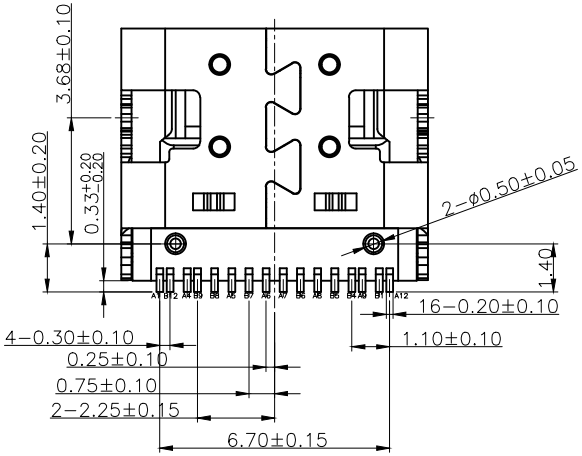

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	SUS 304	NI30u Plated	1PCS
5	SHIELDING PLATE	SUS 301	---	1PCS
4	MD	LCP E1301	BLACK	1PCS
3	CONTACT	C2680	Au 3u/NI30u Plated	1SET
2	CONTACT	C2680	Au 3u/NI30u Plated	1SET
1	HOUSING	LCP E1301	BLACK	1PCS

TOLERANCE		
X.X	±0.30	X.° ± 2°
.XX	±0.20	.X° ± 1°
.XXX	±0.10	.XX° ±0.5°
UNITS		mm
MATERILA		
FINISH		

NAME(INTENDED USE)

CUSTOMER DRAWING

PART NO.

USB-CF016LH-SCW14735

APPD: DAVID

CHED: SIMON

DRAW: Liu Miao

WFD conn 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO.,LTD

TITLE:


C F单排16P 有柱带弹脚长1.40 CONN.

DRAWG NO.

UH0-044

SCALE	SHEET	REV.
1:1	1/1	A

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版发行			2020.11.04

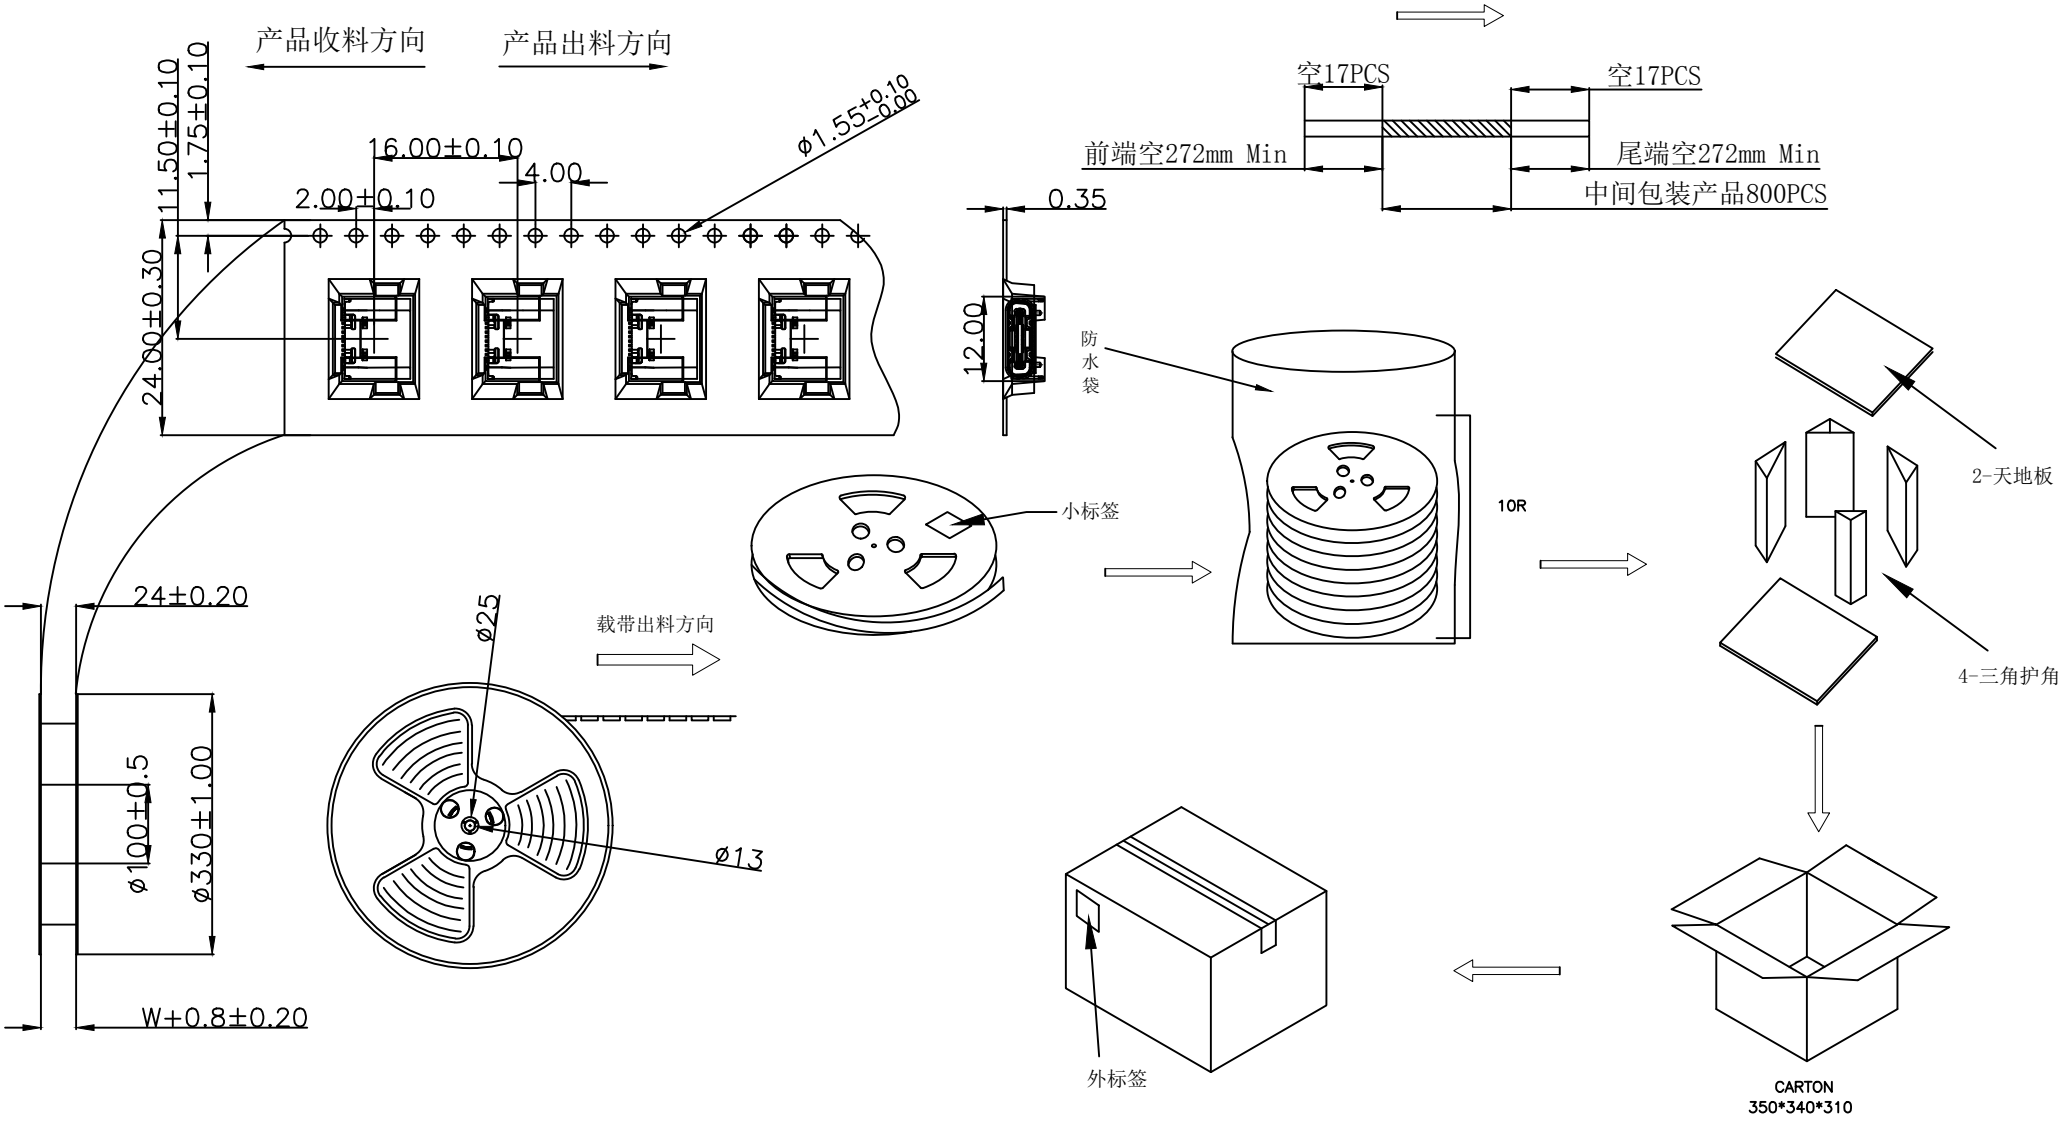

NOTE:

1.QUANTITY/REEL:800 PCS
数量/卷:800 PCS
QUANTITY/INNER CARTON:800 X 10 = 8000 PCS
数量/箱: 800 X 10 = 8000 PCS
2.FREE 17 CAVE IN THE FRONT CARRIER ADN FREE 17 CAVE IN THE END CARRIER.
包装带内圈空17格,外圈空17格.

TOLERANCE		NAME(INTENDED USE) 包装规范	WFD 深圳市旺富达电子有限公司 conn SHEN ZHEN WFD ELECTRONICS CO.,LTD
X. ±0.20	X.° ± 2°	PART NO. USB-CF016LH-SCW14735	TITLE: C TYPE单排16P板上7.35母座成品--包装规范
.X ±0.15	.X° ± 1°		
.XX ±0.10	.XX° ±0.5°	APPD: DAVID	DRAWG NO. PK-UH0-006
UNITS	mm		
MATERILA		CHED: SIMON	SCALE NONE / SHEET 2/2 / REV. A
FINISH		DRAW: LIU MIAO	