


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE |
|---|---|---|---|---|---|
| A | --- | 新版本发行 | | | 2018.04.31 |
| | | | | | |

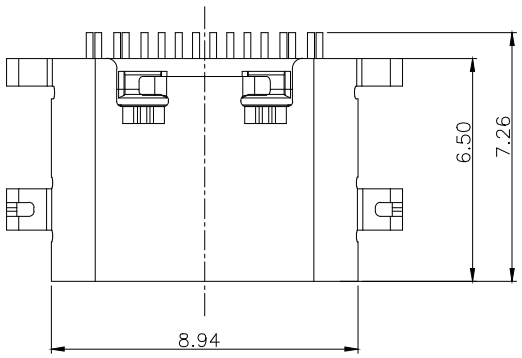


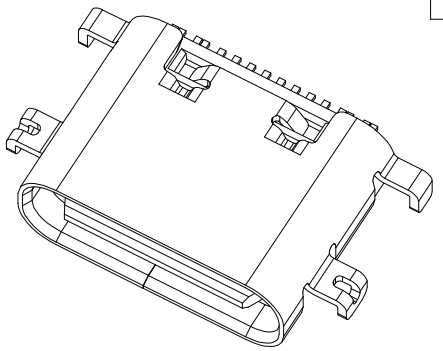



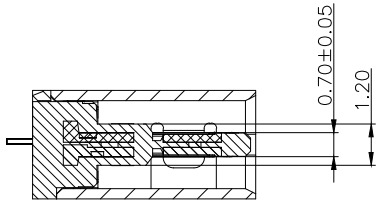
NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES


**WFDconn**

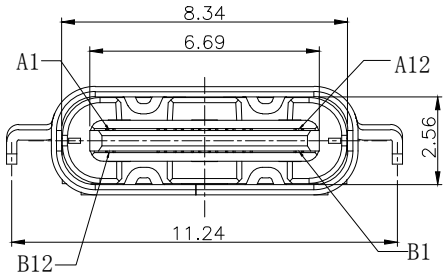

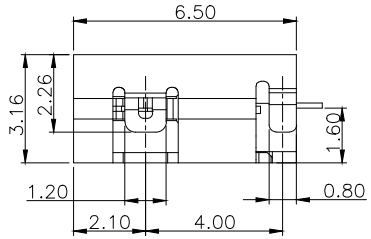


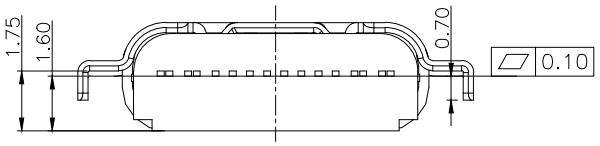
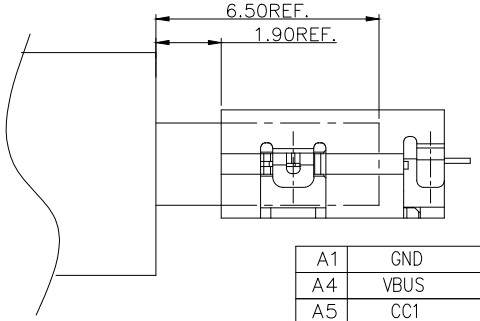


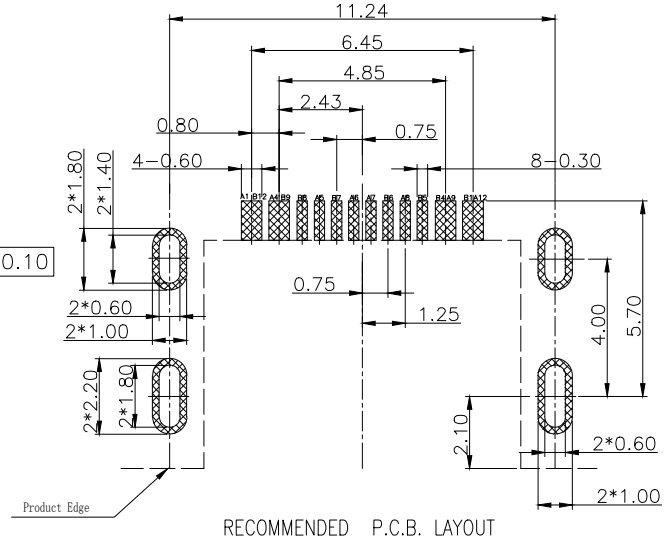

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

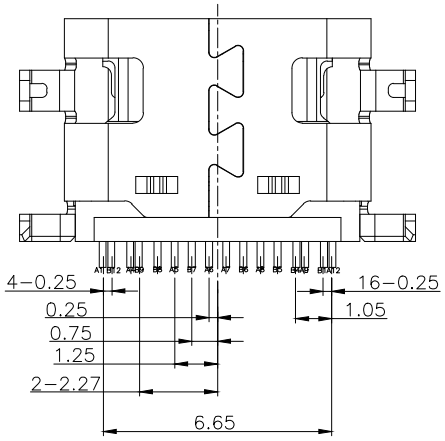


公母对插示图

| A1 | GND | B12 | GND |
|---|---|---|---|
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | DP1 | B7 | DN2 |
| A7 | DN1 | B6 | DP2 |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A12 | GND | B1 | GND |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

| NO. | DESCRIPTION | MATERIAL | REMARKS | QTY |
|---|---|---|---|---|
| 6 | SHELL | SUS304 | NI Plated | 1PCS |
| 5 | SHIELDING PLATE | SUS301 | --- | 1PCS |
| 4 | MD | LCP E130i | BLACK | 1PCS |
| 3 | CONTACT | C2680 | Au/NI Plated | 1SET |
| 2 | CONTACT | C2680 | Au/NI Plated | 1SET |
| 1 | HOUSING | LCP E130i | BLACK | 1PCS |

| TOLERANCE | | | |
|---|---|---|---|
| X.X | ±0.30 | X.° | ± 2° |
| .XX | ±0.20 | .X° | ± 1° |
| .XXX | ±0.10 | .XX° | ±0.5° |
| UNITS | | mm | |
| MATERILA | | | |
| FINISH | | | |

NAME(INTENDED USE)
CUSTOMER DRAWING

PART NO.
USB-CF016LH-CB1665

APPD: DAVID

CHED: SIMON

DRAW: Liu Miao


WFD conn 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO.,LTD

TITLE:
USB C F单排16P 6.5沉板1.6 CONN.

DRAWG NO.
UH0-009

| SCALE | SHEET | REV. |
|---|---|---|
| 1:1 | 1/1 | A |

| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE |
|---|---|---|---|---|---|
| A | --- | 新版发行 | | | 2020.11.04 |
| | | | | | |

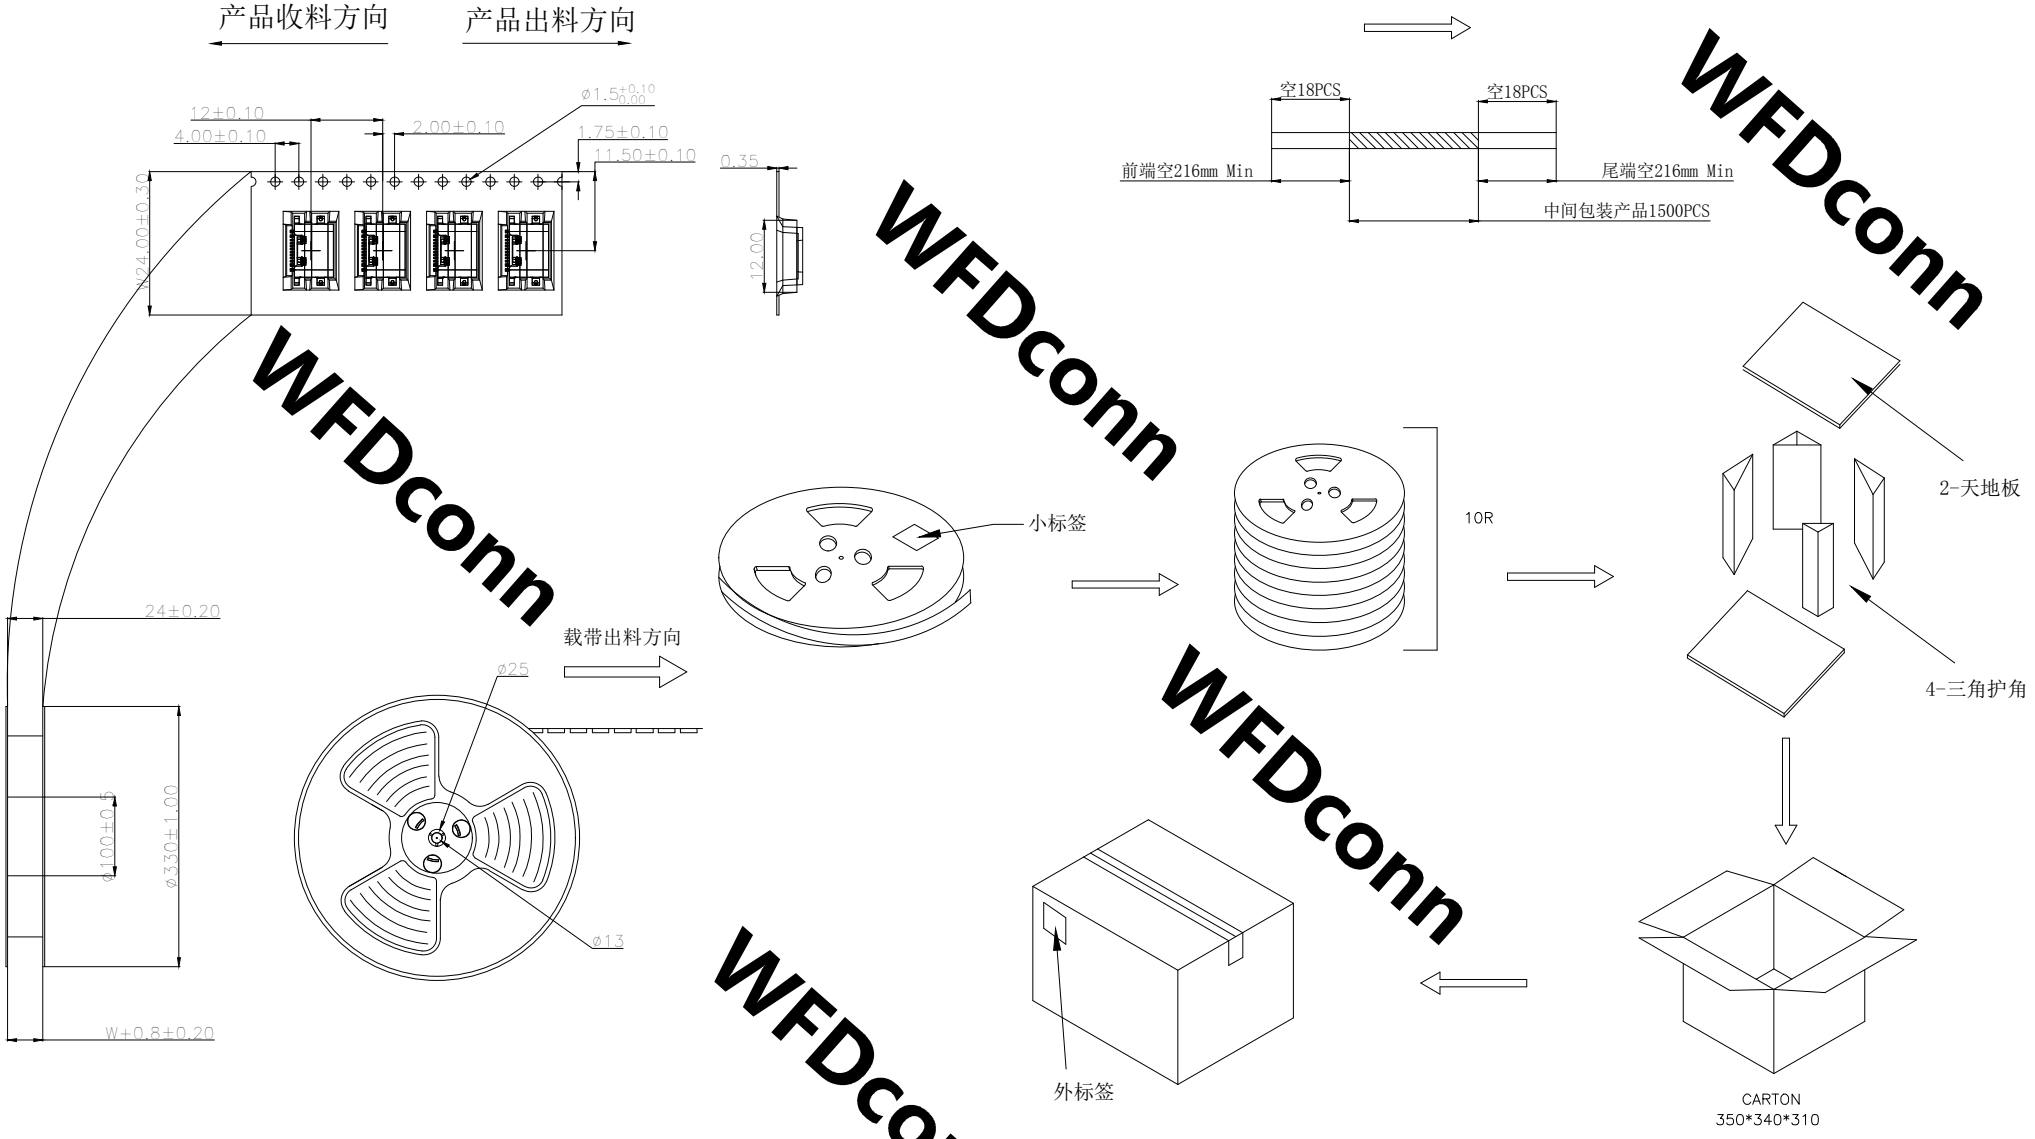


WFDconn

NOTE:

1.QUANTITY/REEL:1500 PCS
數量/卷:1500 PCS
QUANTITY/INNER CARTON:1500 X 10 = 15000 PCS
數量/箱: 1500 X 10 = 15000 PCS
2.FREE 18 CAVE IN THE FRONT CARRIER ADN FREE 18 CAVE IN THE END CARRIER.
包装帶內圈空18格,外圈空18格.

| TOLERANCE | | NAME(INTENDED USE) 包装规范 | WFD 深圳市旺富达电子有限公司 conn SHEN ZHEN WFD ELECTRONICS CO.,LTD |
|---|---|---|---|
| X. ±0.20 | X.° ± 2° | PART NO. USB-CF016LH-CB1665 | TITLE: C TYPE单排16P沉板6.5母座成品--包装规范 |
| .X ±0.15 | .X° ± 1° | | |
| .XX ±0.10 | .XX° ±0.5° | APPD: DAVID | DRAWG NO. PK-UH0-009 |
| UNITS | mm | | |
| MATERILA | | CHED: SIMON | SCALE NONE / SHEET 2/2 / REV. A |
| FINISH | | DRAW: LIU MIAO | |