



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			2019.04.31

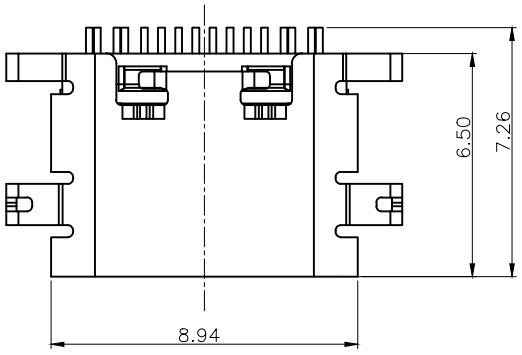


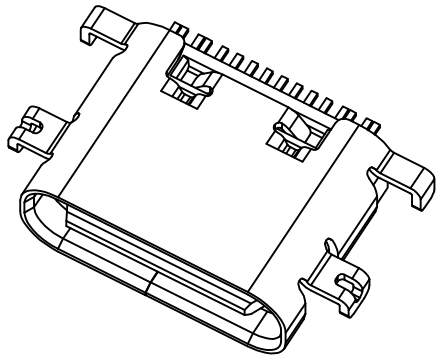


NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

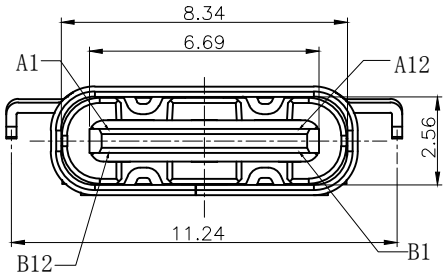


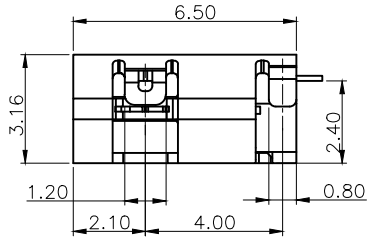


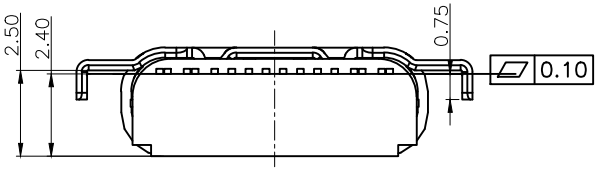

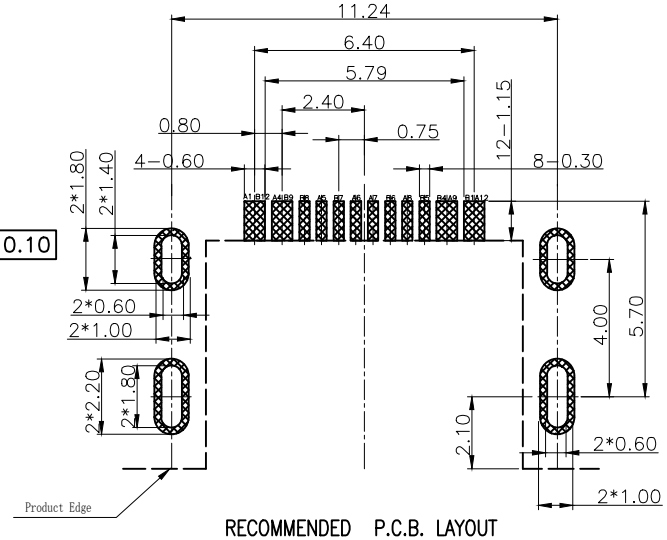

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

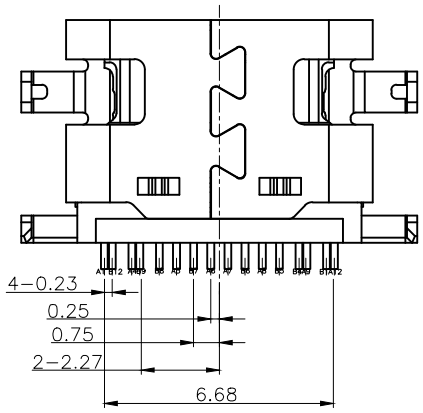

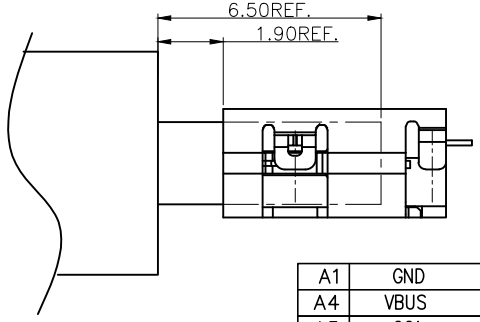

公母对插示图

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

TOLERANCE			
X.X	±0.30	X°	± 2°
.XX	±0.20	.X°	± 1°
.XXX	±0.10	.XX°	±0.5°
UNITS		mm	
MATERILA			
FINISH			

NAME(INTENDED USE)
CUSTOMER DRAWING

PART NO.
USB-CF016LH-CB2465

APPD: DAVID

CHED: SIMON

DRAW: Liu Miao


WFD conn 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO.,LTD

TITLE:
USB C F单排16P 6.5沉板2.4 CONN.

DRAWG NO.
UH0-049

SCALE	SHEET	REV.
1:1	1/1	A

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版发行			2020.11.04

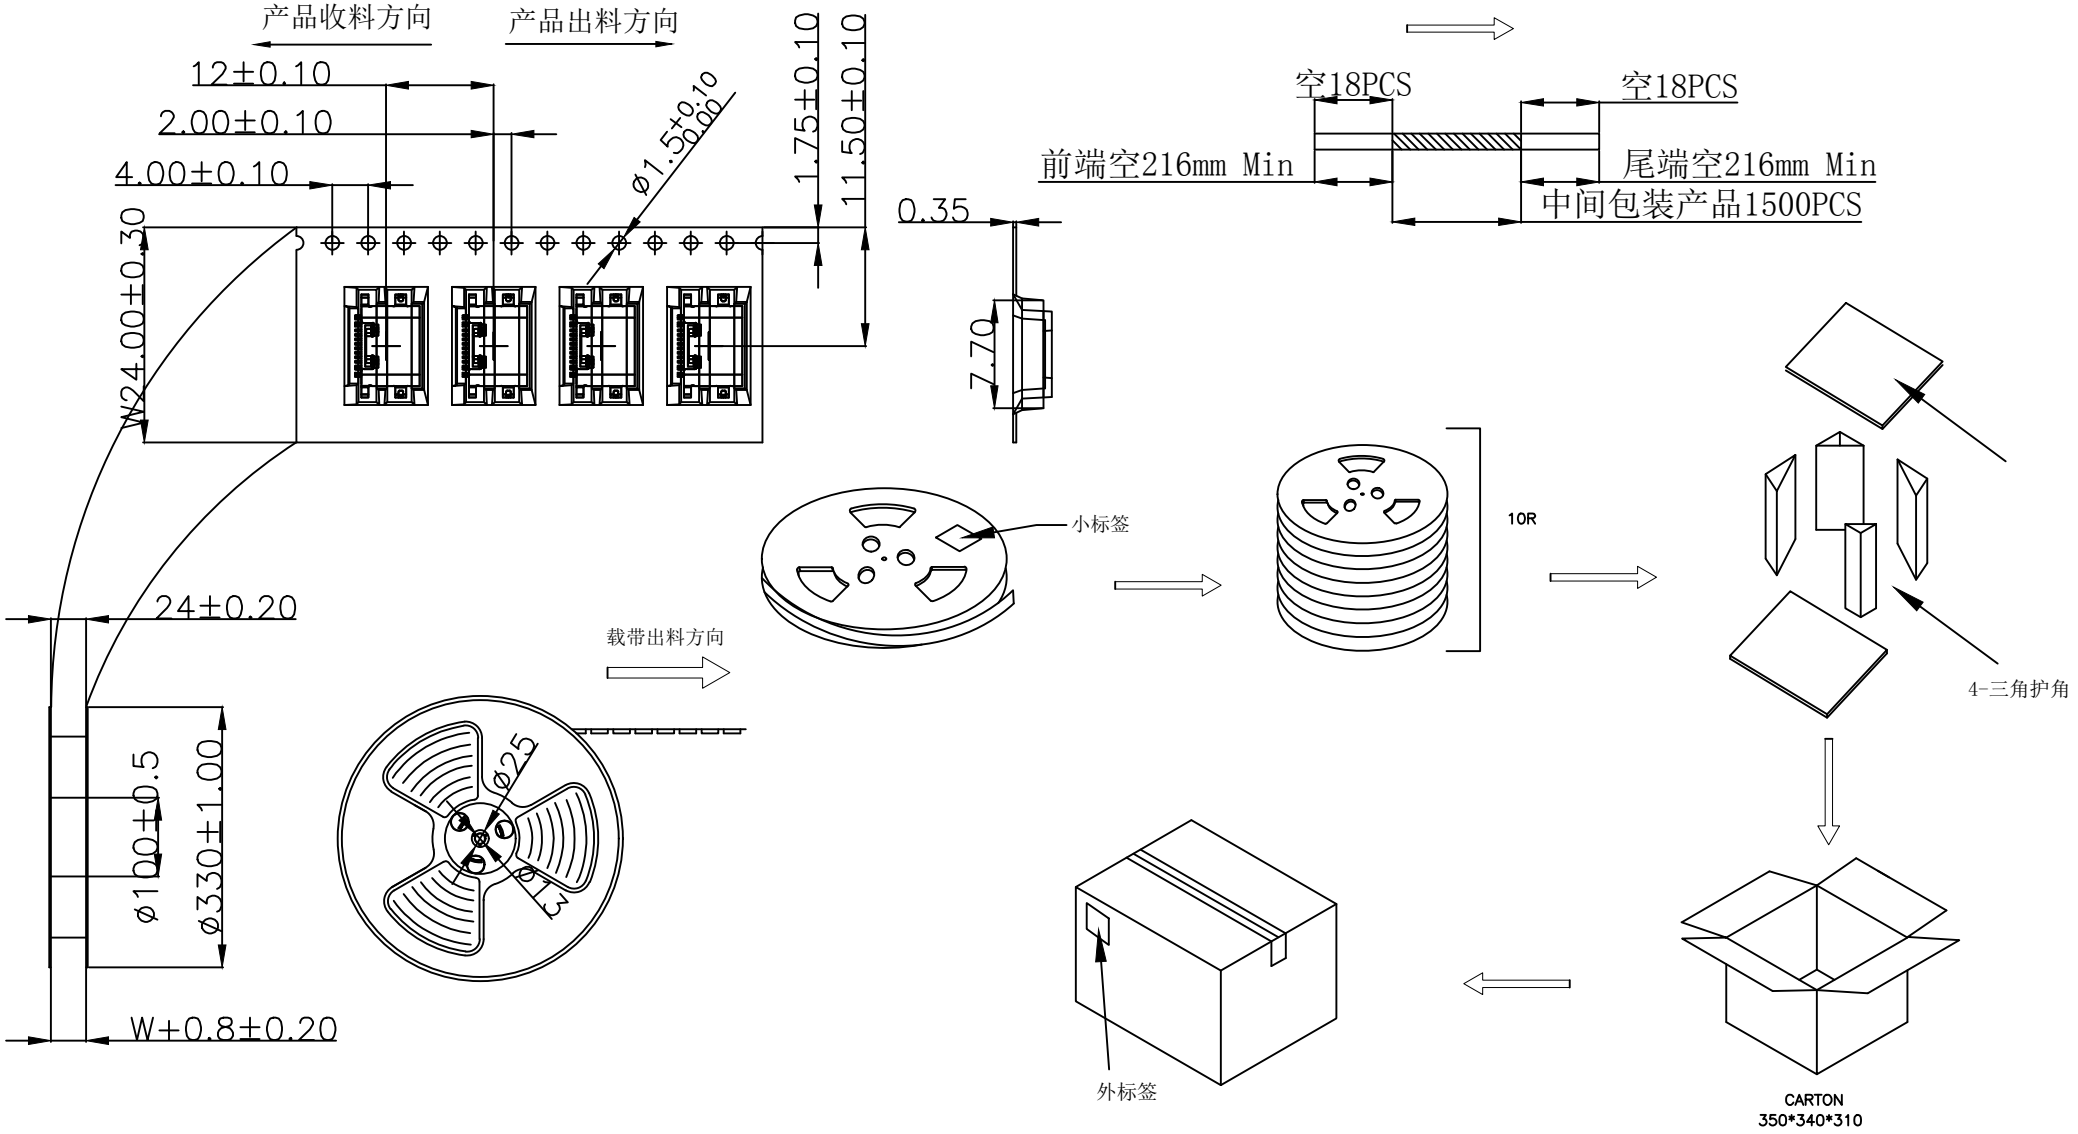

NOTE:

1.QUANTITY/REEL:1500 PCS
數量/卷:1500 PCS
QUANTITY/INNER CARTON:1500 X 10 = 15000 PCS
數量/箱: 1500 X 10 = 15000 PCS
2.FREE 18 CAVE IN THE FRONT CARRIER ADN FREE 18 CAVE IN THE END CARRIER.
包装帶內圈空18格,外圈空18格.

TOLERANCE		NAME(INTENDED USE) 包装规范	WFD conn 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO.,LTD
X. ±0.20	X.° ± 2°	PART NO. USB-CF016LH-CB2465	TITLE: C TYPE单排16P沉板6.5母座成品--包装规范
.X ±0.15	.X° ± 1°		
.XX ±0.10	.XX° ±0.5°	APPD: DAVID	DRAWG NO. PK-UH0-009
UNITS	mm		
MATERILA		CHED: SIMON	SCALE NONE / SHEET 2/2 / REV. A
FINISH		DRAW: LIU MIAO	