HSF RoHS FILE NO :E362810


SPECIFICATIONS


PERFORMANCE


Electical Rating:AC/DC 50V 0.5A
Insulation Resistance: 500MΩ
Contact Resistance:50mΩ Max
Withstang Volt:150V AC/minute
Opratng Temperature:−40°C to +125°C


Material

Contact:Phosphor Bronze Gold−Plated
Housing:LCP
Max.Processing Temp:230°C for30−60 seconds
(260°C for 10 seconds)

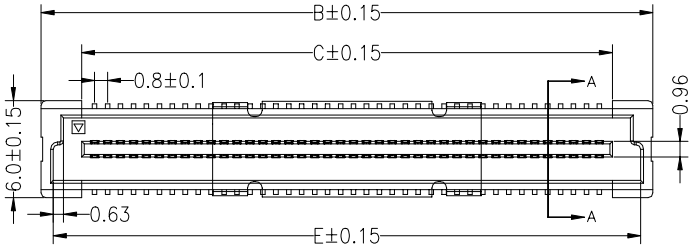




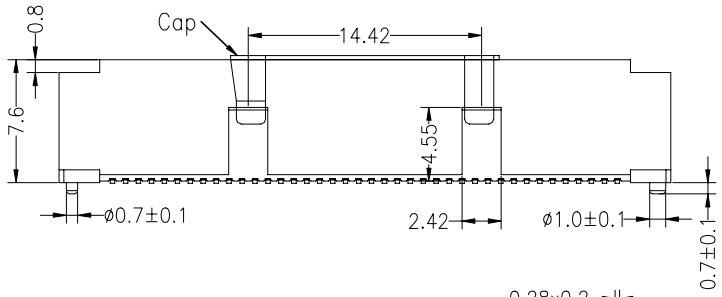



A−A
SECTION

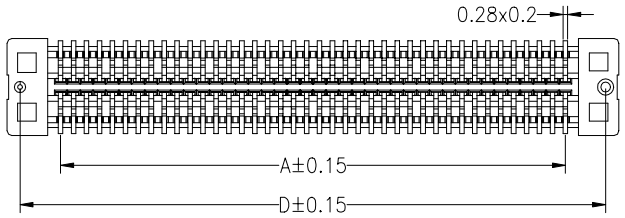


Pin	A	B	C	D	E
120	47.20	53.82	48.80	52.20	52.30

Ordering Information

3710 M 120 076 G0 F R 01

- 120 — No.of Pins 120P
- 076 — Plastics Height H=7.6mm
- G0 — Contact Plating
- R — Packing T=Tube R=Reel+Cap P=Tube+Cap

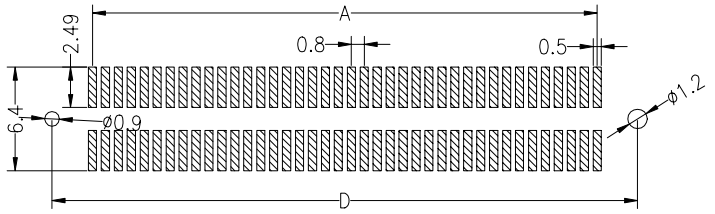

P.C.B Layout

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.12.29	NEW DRAWING	

OPERATION		DRAW	LIU MIAO	20.12.29
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFDCONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3710M120076G0FR01
TITLE:	0.8BTB−120PIN H=7.6公座 15u"半金雾锡
客户料号:	