


HSF RoHS

SPECIFICATIONS
PERFORMANCE
Electical Rating:AC/DC 50V 0.5A
Insulation Resistance: 500MΩ Min
Contact Resistance:50mΩ Max
Withstang Volt:150V AC/minute
Opratng Temperature:−40°C to+105°C
Material
Contact:Phosphor Bronze
Housing:LCP UL94V0
Max.Processing Temp:230°C for30−60 seconds
(260°C for 10 seconds)

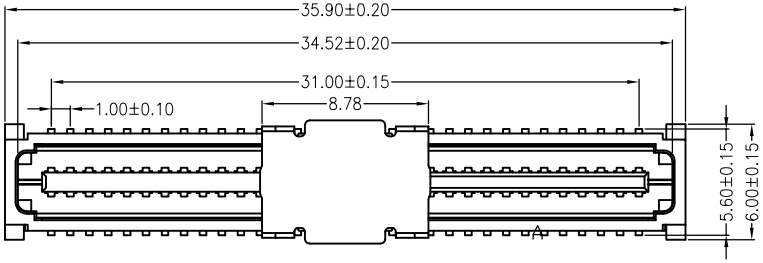

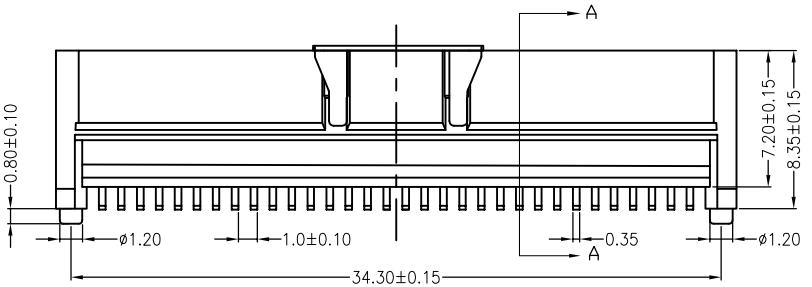




Ordering Information

3712 M 064 083 XX F X 0X

No.of Pins	Piastics Height	Contact Plating	Insulator Material	Packing
64P	H=6.35 H=8.30	G0:Gold Flash G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold S0:Gold Flash/Tin S3:3U" Gold/Tin	Option F=LCP	R=Tape&Reel P=Tube+Cap

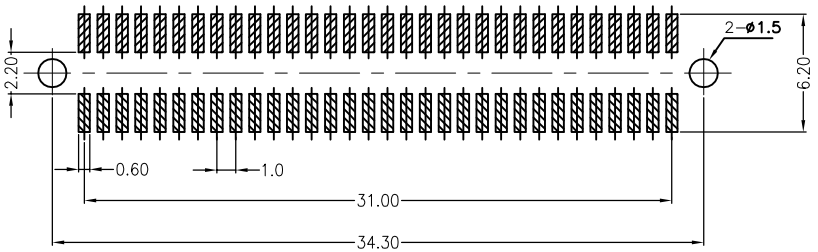

RECOMMEND P.C.BOARD LAYOUT
PCB TOLERANCE:±0.05

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.11.01	NEW DRAWING	

OPERATION		DRAW	LIU MIAO	19.11.01
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3712M064083XXFX0X
TITLE:	**1.0BTB−64P H=8.3公头**