HSF RoHS

SPECIFICATIONS

PERFORMANCE

Electical Rating:AC/DC 50V 1.0A

Insulation Resistance: 500MΩ Min

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute

Opratng Temperature:−40°C to +105°C


Material


Contact:Phosphor Bronze


Housing:LCP UL94V0

Max.Processing Temp:230°C for30−60 seconds

(260°C for 10 seconds)

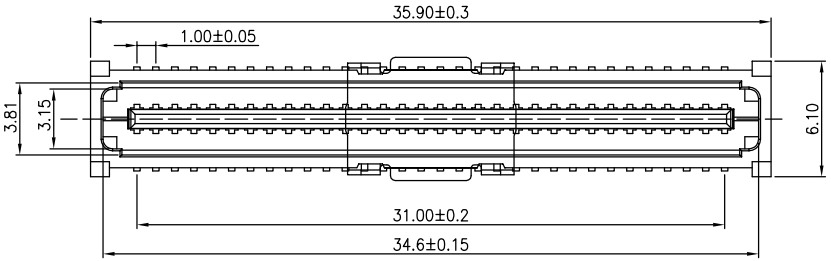

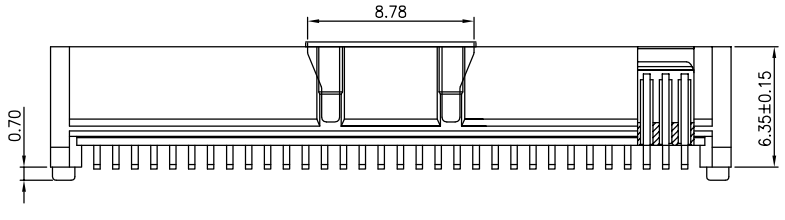


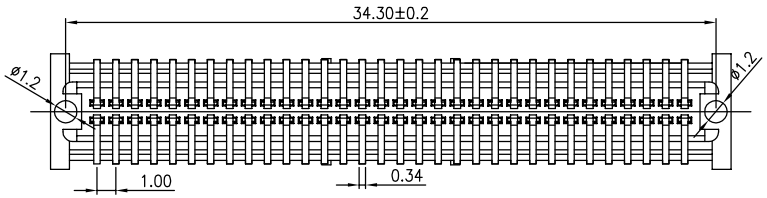

Ordering Information

3712 M 064 063 XX X R 0X

No.of Pins	Piastics Height	Contact Plating	Insulator Material	Packing
64P	H=6.35 H=8.30	G0:Gold Flash G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold S0:Gold Flash/Tin S3:3U" Gold/Tin	Option F=LCP	R=Tape&Reel P=Tube+Cap

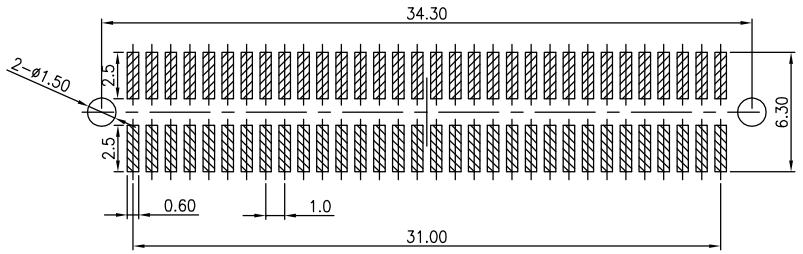

RECOMMEND P.C.BOARD LAYOUT

PCB TOLERANCE:±0.05

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.05.18	NEW DRAWING	

OPERATION		DRAW	LIU MIAO	21.05.18	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3712M064063XXXR0X
TITLE:	1.0BTB−64P H=6.35 Male With post