



RoHS  Compliant



TOP VIEW



NOTES

MATERIAL


- 1.HOUSING : PBT BLACK UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN 80u" MIN OVER NICKEL 50u" MIN.

ELECTRICAL


- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- 6.DURRABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:


- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -40℃~+85℃.




LEFT SIDE VIEW




FRONT VIEW




RIGHT SIDE VIEW



BACK VIEW

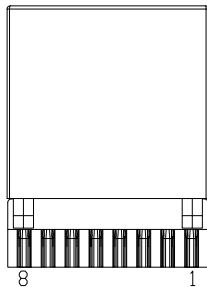

BOTTON VIEW

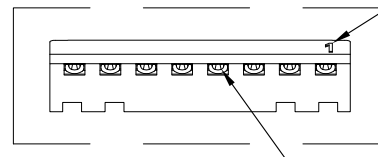



A SIZE:1.5:1

U型焊盘, 盘面加凸点

PIN位标示

NO.	PACKING	PART NO.	Gold Plating
1	TRAY	WFD52W811SX002202111000	1u"
2		WFD52W811SX003202111000	3u"
3		WFD52W811SX004202111000	6u"
4		WFD52W811SX005202111000	15u"
5		WFD52W811SX006202111000	30u"
6		WFD52W811SX007202111000	50u"

							TOLERANCES				TITLE					
							.X	±0.30	WFD COMM 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD				RJ45 JACK 8P8C 全塑 焊线式 U型端子			
							.XX	±0.25					PART NO. SEE TABLE			
							.XXX	±0.10					UNIT MM SCALE 1:1 CHECKED REV A4			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		APPROVAL	CHECK	DRAWN	DATA				
											Liu Miao	2020/6/10				