



RoHS  Compliant

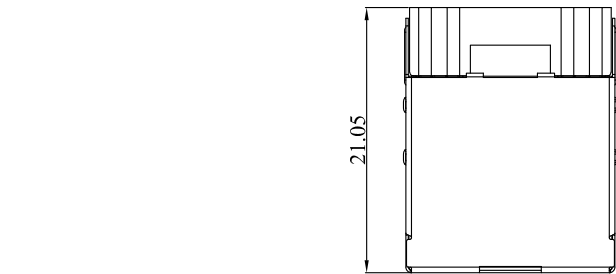

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.
- 5.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL


- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL


- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:


- 1.STORAGE : -40°C~+85°C.
- 2.OPERATION : -40°C~+85°C.




LEFT SIDE VIEW



FRONT VIEW




RIGHT SIDE VIEW

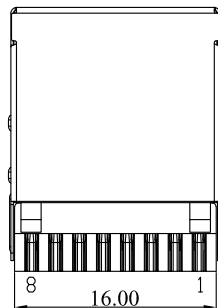

BOTTON VIEW

PART NO.	Gold Plating
WFD52W811EX002212111000	1u"
WFD52W811EX003212111000	3u"
WFD52W811EX004212111000	6u"
WFD52W811EX005212111000	15u"
WFD52W811EX006212111000	30u"
WFD52W811EX007212111000	50u"

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	TOLERANCES	WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD				TITLE RJ45 JACK 8P8C 屏蔽 无弹 无灯 焊线式 U型端子			
							.X ±0.30 .XX ±0.25 .XXX ±0.10	APPROVAL	CHECK	DRAWN	DATA	PART NO. WFD52W811EX002212111000			
							PROJECT 			Liu Miao	2017/10/13	UNIT	SCALE	CHECKED	REV
												MM	1:1		A4