
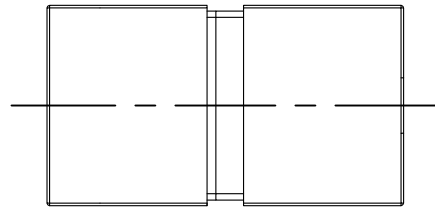

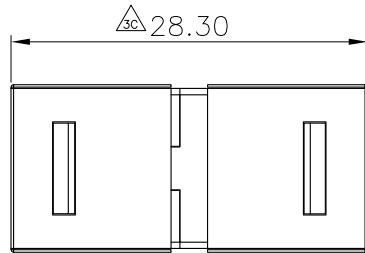
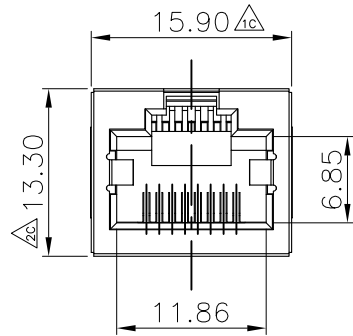


RoHS  Compliant

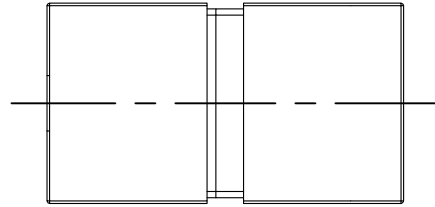

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.CONTACT : PHOSPHOR BRONZE T=0.35mm.
- 3.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING OVER NICKEL.
- 4.SHIELD : STAINLESS STEEL

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- 6.DURRABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+75℃.

PART NO.	Gold Plating
WFDZTB811EB004201112059	6u"
WFDZTB811EB005201112059	15u"
WFDZTB811EB006201112059	30u"
WFDZTB811EB007201112059	50u"

							TOLERANCES				TITLE					
							.X	±0.30	<b>WFD</b> 深圳市旺富达电子有限公司 CONN SHEN ZHEN WFD ELECTRONICS CO., LTD				RJ45屏蔽直通模块 无椭圆孔 四面全包 两侧带边 镀金6U			
							.XX	±0.25					PART NO.			
							.XXX	±0.10					APPROVAL			
20200617	A	B	20200617002	变更料号及更新图框	Ethan	Iven	PROJECT				APPROVAL	CHECK	DRAWN	DATA		
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL							Liu Miao	2020/06/17		
											UNIT	SCALE	CHECKED	REV		
											MM	1:1		A4		