
NOTES:


1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.


3.CODING INFORMATION: BB232-xxxS-B3R-01

- WATER CODE
- PACKING: R: CARRIER REEL
- MATERIAL: 3:LCP
- COLOR: B:BLACK
- S:SOCKET
  PIN
- PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 0.5 BTB
  HIGHLY: 32--3.25H
- WFD CONN BTB CONNECTOR SERIES

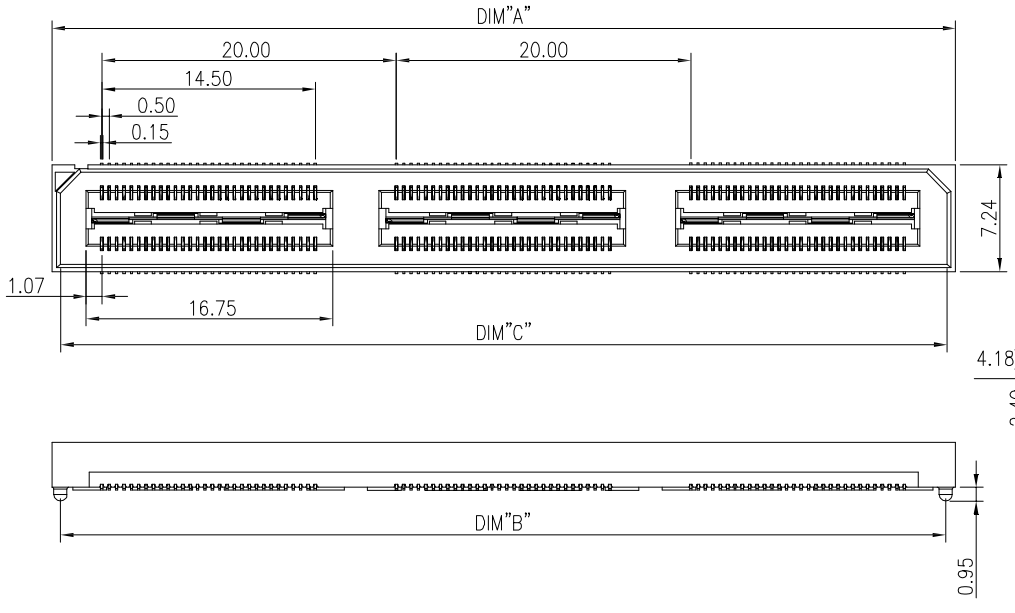

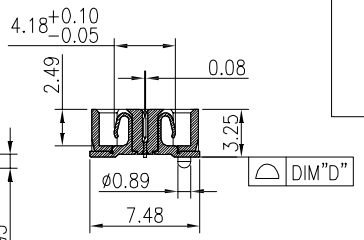

SECTION A-A

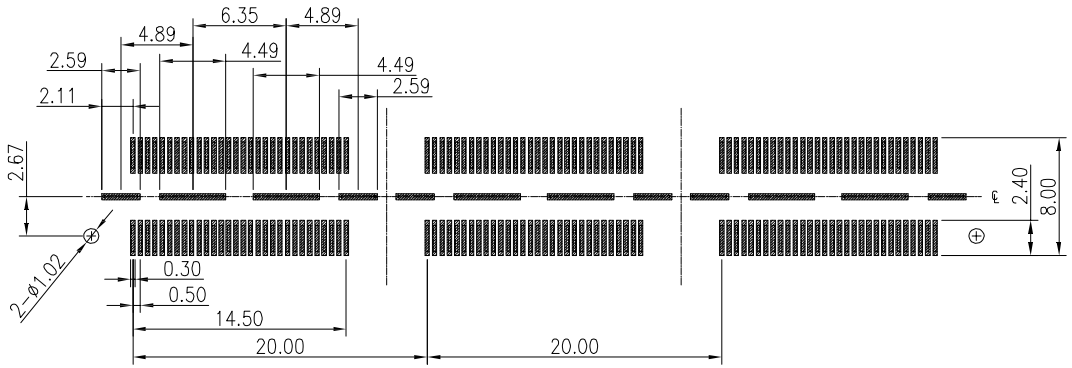

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

NO. of contacts	Dimensions			
	A.	B.	C.	D.
60	21.38	20.13	20.18	0.10
120	41.38	40.13	40.18	0.10
180	61.38	60.13	60.18	0.15
240	81.38	80.13	80.18	0.15
300	101.38	100.13	100.18	0.15

RoHS Compliant 2013/95/EC

Pb Process Capable

修订 SER	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

CUSTOMER

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

一般公差 GENERAL TOLERANCE
.X ±0.25
.XX ±0.20
.XXX ±0.10
ANGLES ±1°

制图 (DR): LIU MIAO

品名(TITLE): 0.5mm DOUBLE ROW BTB SOCKET H3.25

审核 (CHKD):

料号(PART NO): BB232-XXXS-B3R-01(QSH)

版本 (REV) A

核准 (APPD):

比例(SCALE) 1:8

单位(UNITS) mm

张数(SHEET) 1 OF 1

图幅(SIZE) A4