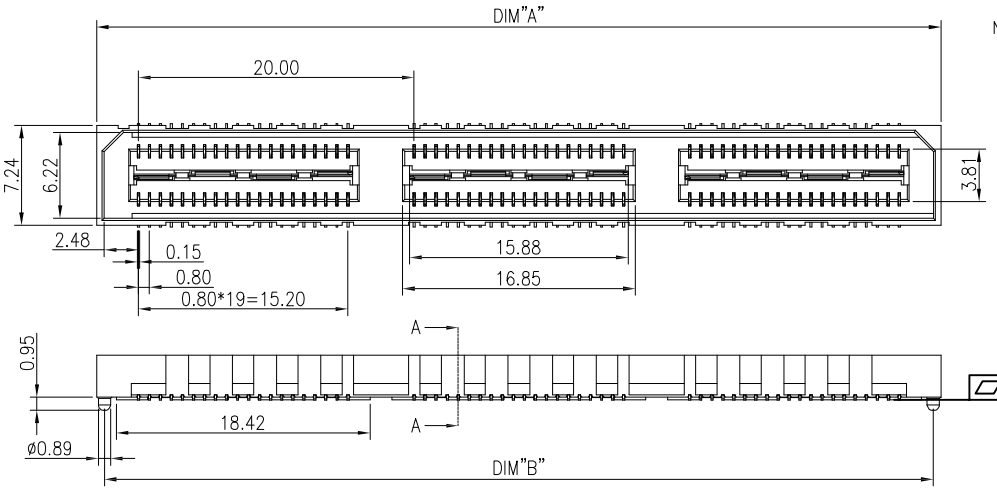



NOTES:


1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.


3.CODING INFORMATION: BB332-xxxS-B3R-01

- WATER CODE
- PACKING: R: CARRIER REEL
- MATERIAL: 3:LCP
- COLOR: B:BLACK
- S:SOCKET
- PIN
- PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE IIN ON TAIL.
  3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 0.8 BTB
  HIGHLY: 32--3.25H
- WFD CONN BTB CONNECTOR SERIES

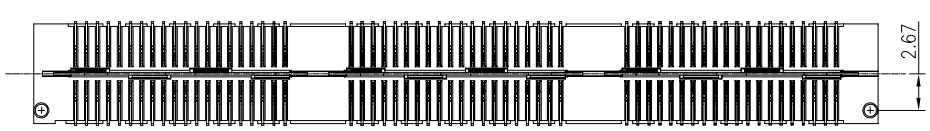



SECTION A-A

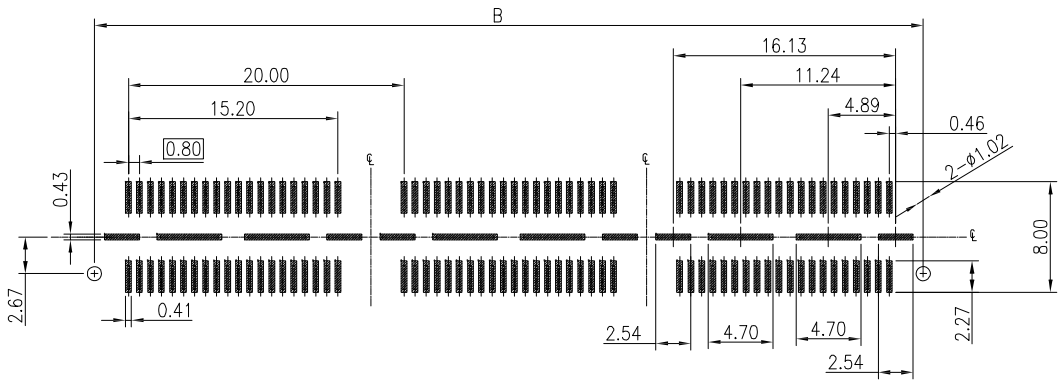

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

NO. of contacts	Dimensions	
	A.	B.
40	21.28	20.13
80	41.28	40.13
120	61.28	60.13
160	81.28	80.13
200	101.28	100.13

RoHS Compliant 2013/95/EC

Pb Process Capable

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

一般公差 GENERAL TOLERANCE
.X ±0.25
.XX ±0.20
.XXX ±0.10
ANGLES ±1°

版本 (REV) A

制图 (DR): LIU MIAO

审核 (CHKD):

核准 (APPD):

WFDCONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

品名(TITLE): 0.8mm DOUBLE ROW BTB SOCKET H3.25

料号(PART NO): BB 332-XXXS-B3R-01 (QSE)

比例(SCALE)	单位(UNITS)	张数(SHEET)	图幅(SIZE)
1:8	mm	1 OF 1	A4