

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

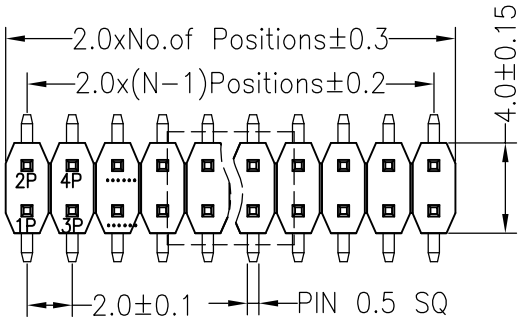


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

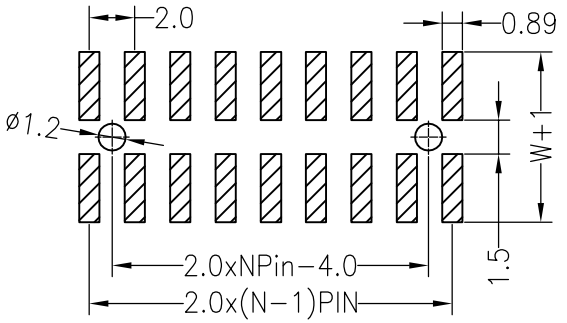


Ordering Information

1320 12 XX X X XX M XXX X 0X

No.of Pins Per Row 1x40	Insulator Material Option	Contact Plating	Pin Length	Packing
	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 F=BK−LCP	G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold S0:Gold Flash/Tin SN:Tin		A=Tray T=Tube O=Pe R=Tape&ReeL P=Tube&ReeL

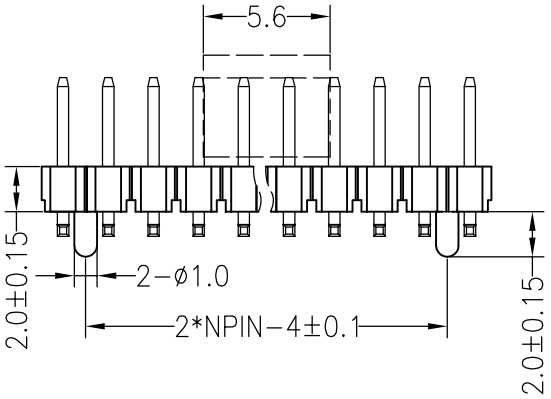

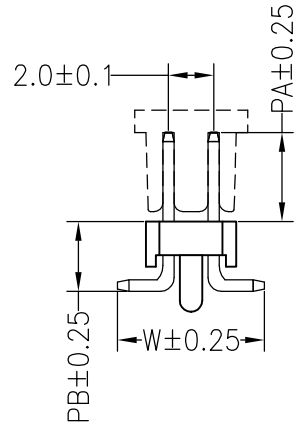

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	3.20	6.40	8.70

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.10.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.10.28	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	1320−12XXXXXXMXXX02
TITLE:	2.0PH 2xNpin H2.0MM SMT夹持盖