HSF RoHS

FILE NO :E362810

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c


Contact Material:Brass

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V−0)

Standard: PA6T

Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

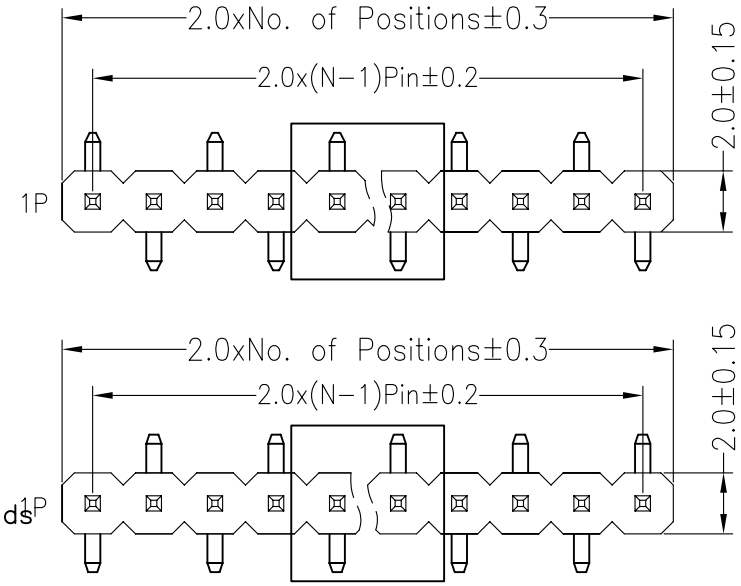


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

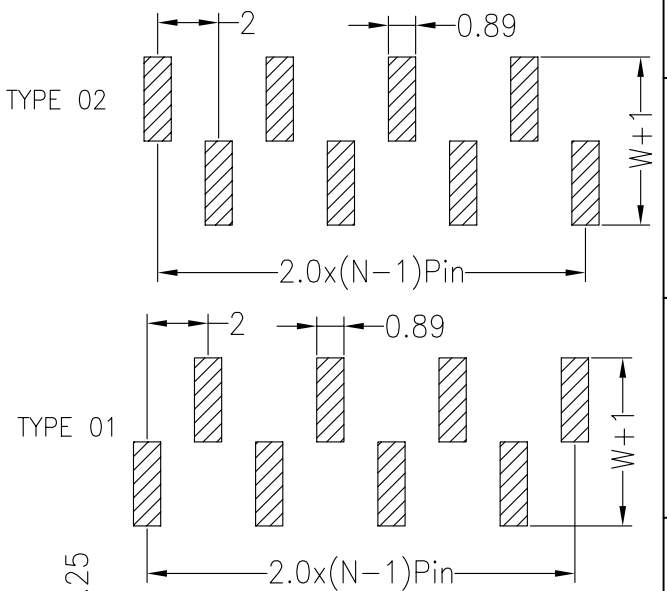


Ordering Information

1320 2 1 XX X N XX M XXX X 01(2)

No.of Pins Per Row	Insulator Material Option	Post	Contact Plating	Pin Length	Packing
1*1~1*40	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 F=BK−LCP	W=With Post N=W/O Post	G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin		0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap

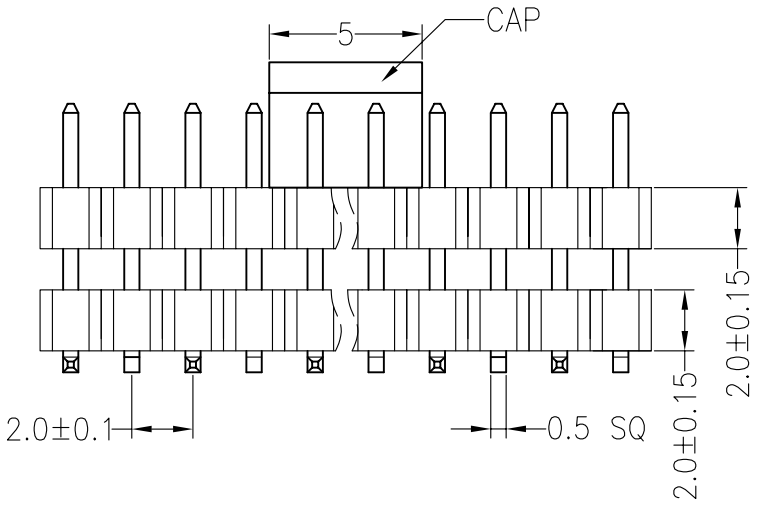

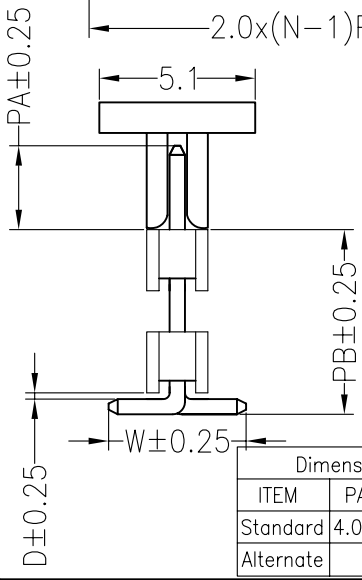

Dimension antitheses list					
ITEM	PA	PB	D	W	L
Standard	4.00	4.60	0.10	4.50	10.4
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.10.05	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.10.05
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	132021XXXNXXMXXXX01(2)
TITLE:	2.0PH 1xNpin 2+H2.0mm SMT