
HSF RoHS

FILE NO :E362810


SPECIFICATIONS


Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

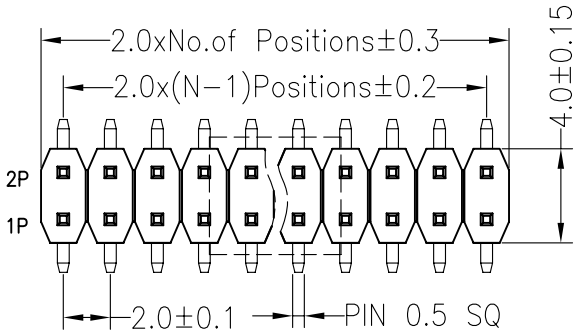


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

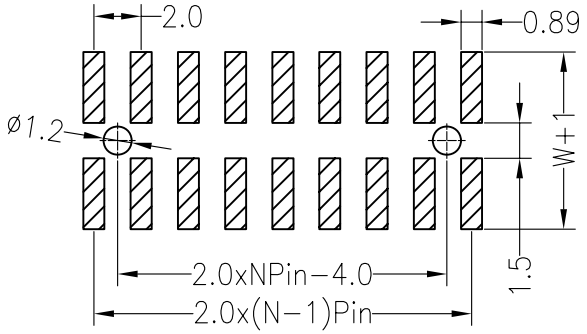

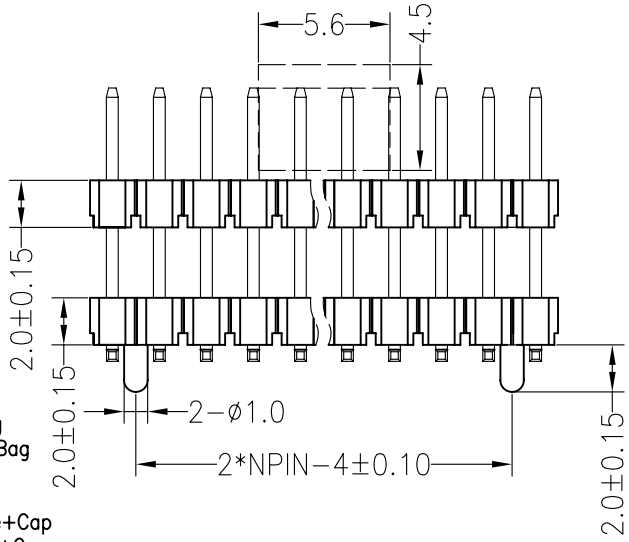

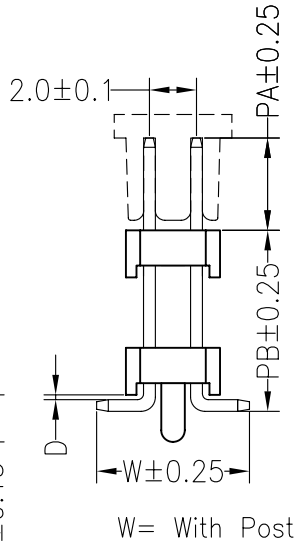

W= With Post



N= W/O Post

Ordering Information

1320 2 2 XX X X XX M XXX X 02

No.	Item	Description
1	No.of Pins Per Row 2*40	
2	Insulator Material Option	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP
3	Post	W=With Post N=W/O Post
4	Contact Plating	G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold S0:Gold Flash/Tin SN:Tin
5	Pin Length	
6	Packing	0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar

Dimension antitheses list

ITEM	PA	D	PB	W	L
Standard	4.00	0.10		6.50	
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	12.04.11
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	132022XXXXXXMXXX02
TITLE:	2.0PH 2xNpin Double Plastic SMT 夹持盖