

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5−10 seconds)

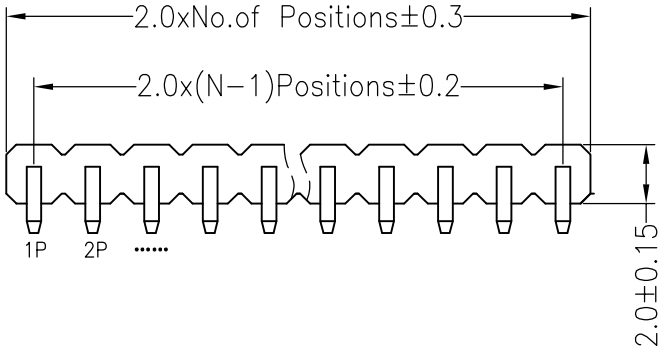


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

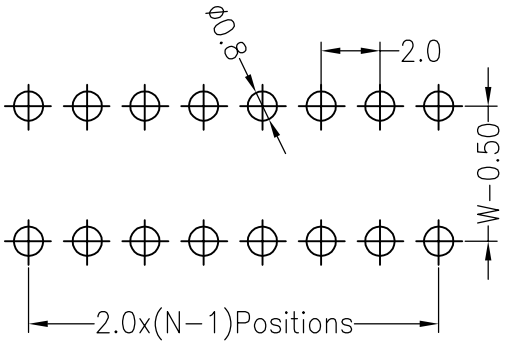


Ordering Information

1315 11 XX X N XX U XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40	A=BK−PBT	G0:Gold Flash		0=PE Bag
2x40	B=BK−PA66	G1:1U" Gold		A=Tray
3x40	C=BK−PA6T	G2:1.5U" Gold		T=Tube
1−−40	D=BK−PA46	G3:2U" Gold		P=Tube+Cap
2−−80	E=BK−PA9T	G4:3U" Gold		R=Reel+Cap
3−−120	F=BK−LCP	S0:Gold Flash/Tin		M=Reel+Mylar
		SN:Tin		

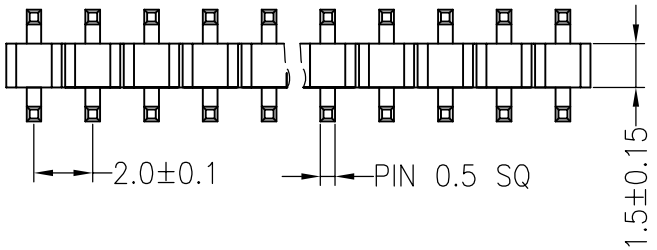



注:塑胶居中

Dimension antitheses list			
ITEM	PC	W	L
Standard	3.00	6.10	13.00
Alternate	3.00	4.90	11.8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.03.20	NEW DRAWING	

OPERATION		DRAW	Liu Miao	20.03.20	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	131511XXXNXXUXXXX0X
TITLE:	2.0PH 1xNpin H1.5mm Single 90°