

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

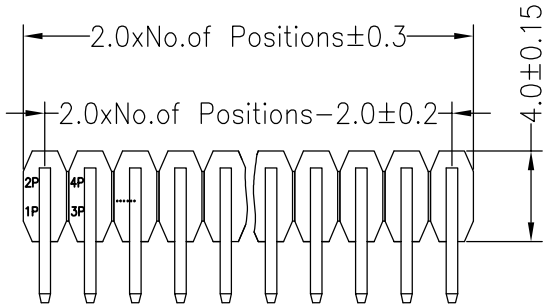

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

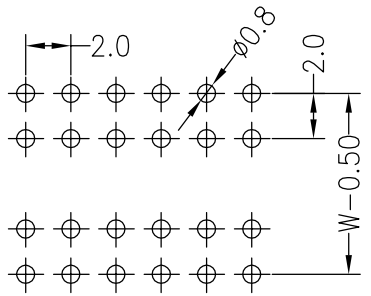

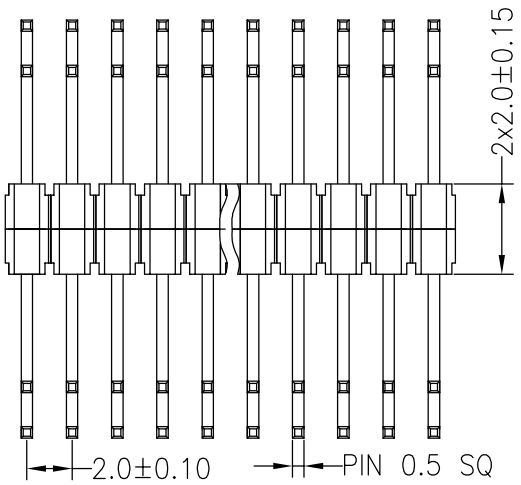

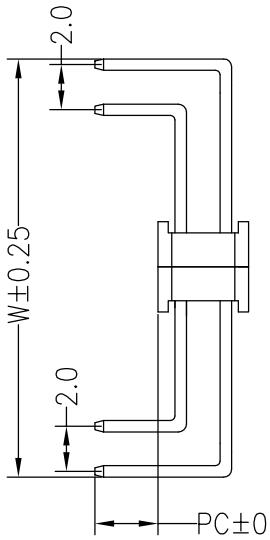

Ordering Information

1320-22 XX X N XX U XXX X 02

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40	A=BK−PBT	G0:Gold Flash		0=PE Bag
2x40	B=BK−PA66	G1:3U" Gold		A=Tray
3x40	C=BK−PA6T	G2:5U" Gold		T=Tube
1−−40	D=BK−PA46	G3:10U" Gold		P=Tube+Cap
2−−80	E=BK−PA9T	G4:15U" Gold		R=Reel+Cap
3−−120	F=BK−LCP	G5:30U" Gold		
		S0:Gold Flash/Tin		
		SN:Tin		

注:塑胶居中

Dimension antitheses list			
ITEM	PC	W	L
Alternate	2.80	11.75	14.30/ 22.30

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.03.11	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	14.03.11
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	1320−22XXXXXXUXXXX02
TITLE:	2.0PH 2xNpin H2.0+2.0mm 两边弯