

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

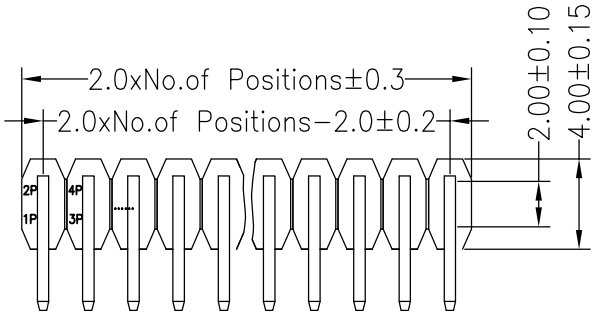

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

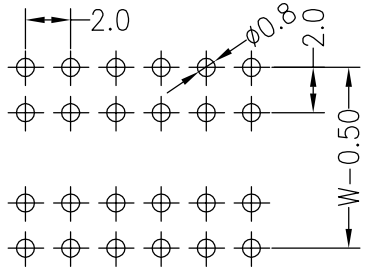

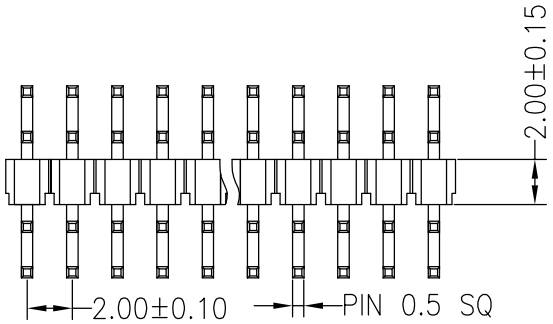



Ordering Information

1320 12 XX X N XX U XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40 2x40 3x40 1−−40 2−−80 3−−120	A=BK−PBT C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP	G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin		0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar

注:塑胶居中

Dimension antitheses list				
ITEM	PC	W	L短	L长
Alternate	2.80	12.30	14.80	22.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.19	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.09.19
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	132012XXXNXXUXXXX01
TITLE:	2.0PH 2xNpin H2.0MM 两边弯