

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

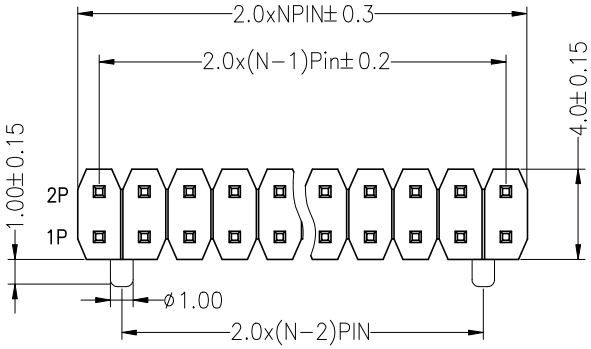

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

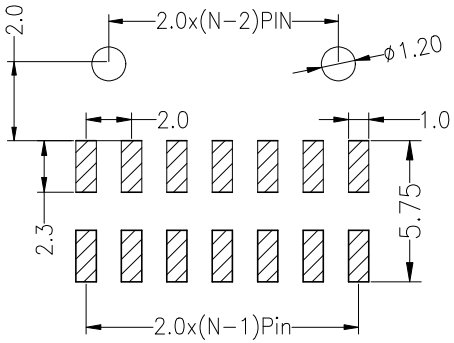

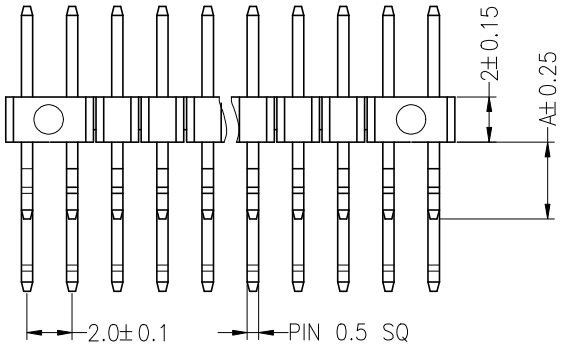

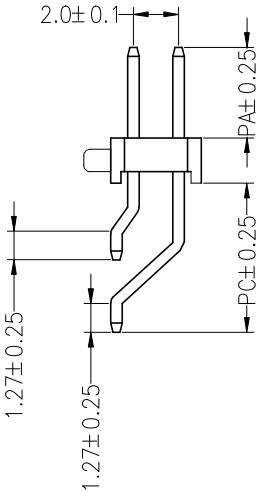

Ordering Information

1320 1 2 XX X W XX Z XXX X 0X

- No.of Pins Per Row: 1~40P
- Insulator Material Option: A=BK−PBT; C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- Post: W=With Post; N=W/O Post
- Contact Plating: G0:Gold Flash; G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; S0:Gold Flash/Tin; SN:Tin
- Pin Length
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap
- Series No.: 01~99

Dimension antitheses list			
ITEM	PA	A	PC
Standard	4.00	3.40	6.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.10.09	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	21.10.09
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	132012XXXWXXZXXXX0X
TITLE:	2.0PH 2xNpin H2.00mm 90° SMT 带侧柱