

HSF RoHS FILE NO:E472355


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

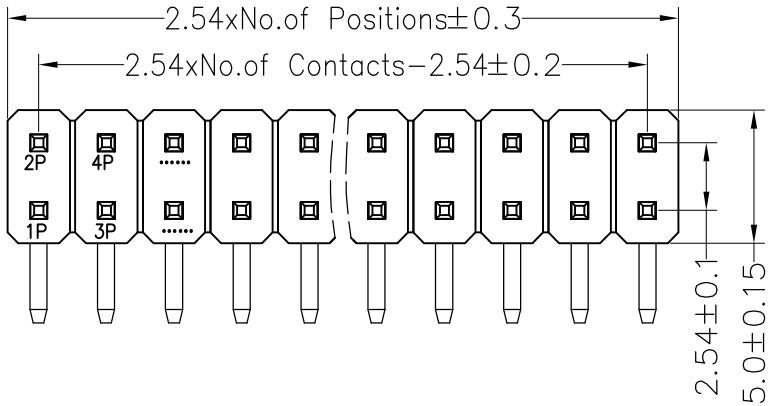

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

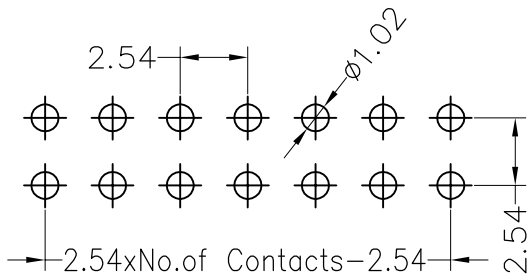

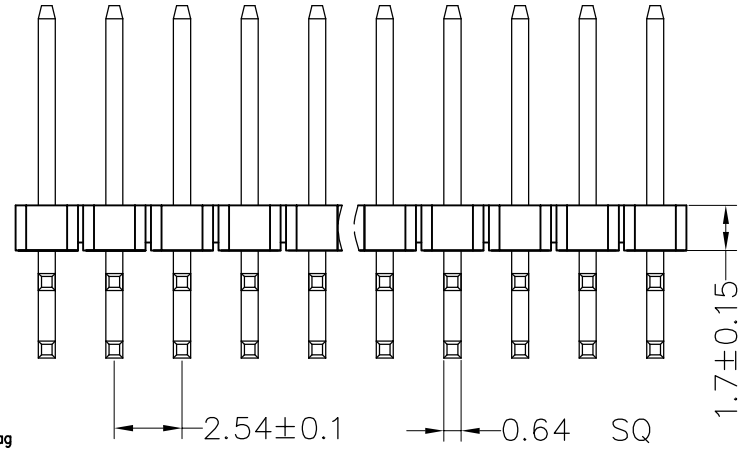

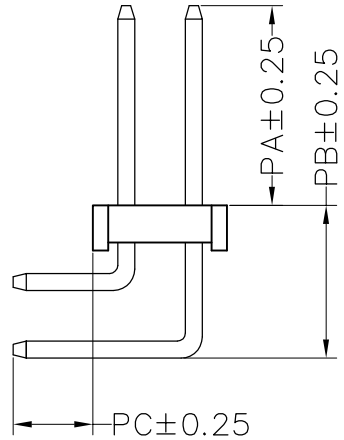

Ordering Information

1217 12 XX X N XX R XXX X 01

- XX — No.of Pins 2x40P
- X — Insulator Material Option
  - A=BK-PBT
  - B=BK-PA66
  - C=BK-PA6T
  - D=BK-PA46
  - E=BK-PA9T
  - F=BK-LCP
- XX — Contact Plating
  - G0:Gold Flash
  - G1:3U" Gold
  - G2:5U" Gold
  - G3:10U" Gold
  - G4:15U" Gold
  - G5:30U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- XXX — Pin Length
- X — Packing
  - 0=PE Bag
  - T=Tube
  - A=Tray
- 01

Dimension antitheses list				
ITEM	PA	PC	PB	L
Standard	6.00	3.00	6.90	13.80/18.80
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.02.23	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	17.02.23
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	121712XXXNXXRXXXX01
TITLE:	2.54PH H1.7 Dual Row 90°