

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Or Tin Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

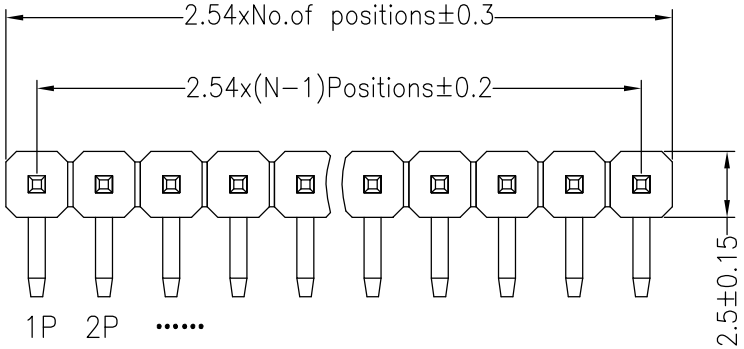


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

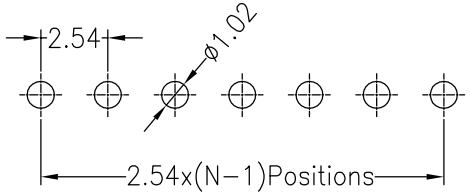


Ordering Information

1225 11 XX X N XX R XXX X 01

- XX — No.of Pins Per Row: 1x40, 1−−40
- X — Insulator Material Option: A=BK−PBT, C=BK−PA6T, D=BK−PA46, E=BK−PA9T, F=BK−LCP
- XX — Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold, S0:Gold Flash/Tin, SN:Tin
- XXX — Pin Length
- X — Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

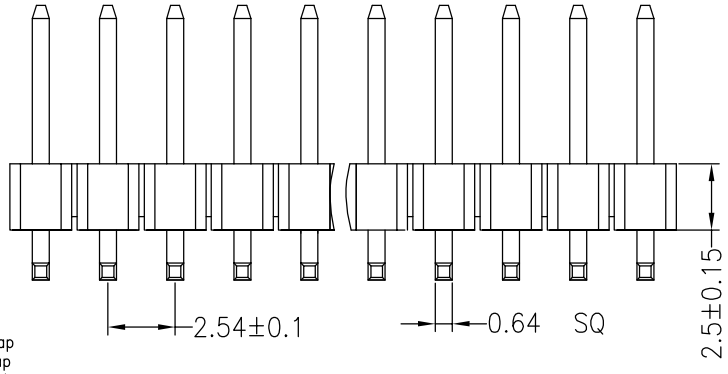

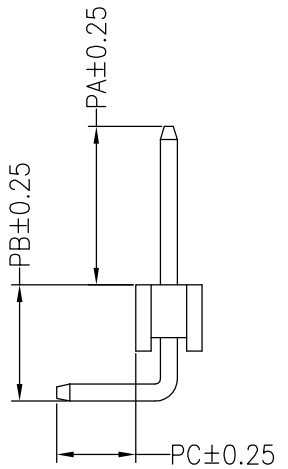

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	4.40	3.00	13.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2016.08.08	NEW DRAWING	

OPERATION				
X.X	±0.30	Liu Miao	OuYangHui	16.08.08
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	122511XXXNXXRXXXX01
TITLE:	2.54mm Pin Header 2.5mm Single 90°正弯