

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Soldering temperature: 260°C±5° 5S

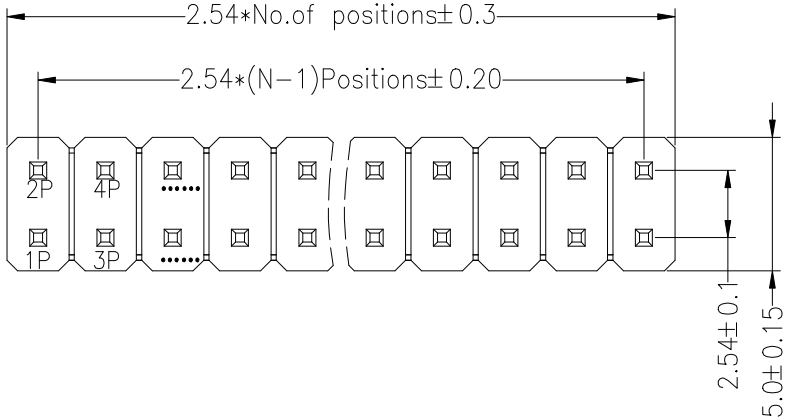


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

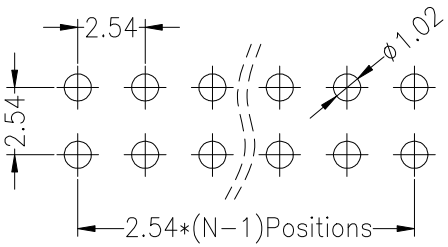


Ordering Information

1225 22 XX X N XX S XXX X 0X

- XX: No.of Pins Per Row 1~40P
- X: Insulator Material Option
  - A=BK-PBT
  - C=BK-PA6T
  - E=BK-PA9T
  - F=BK-LCP
- XX: Contact Plating
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- XXX: Pin Length
- X: Packing
  - 0=PE Bag
  - A=Tray
  - T=Tuber

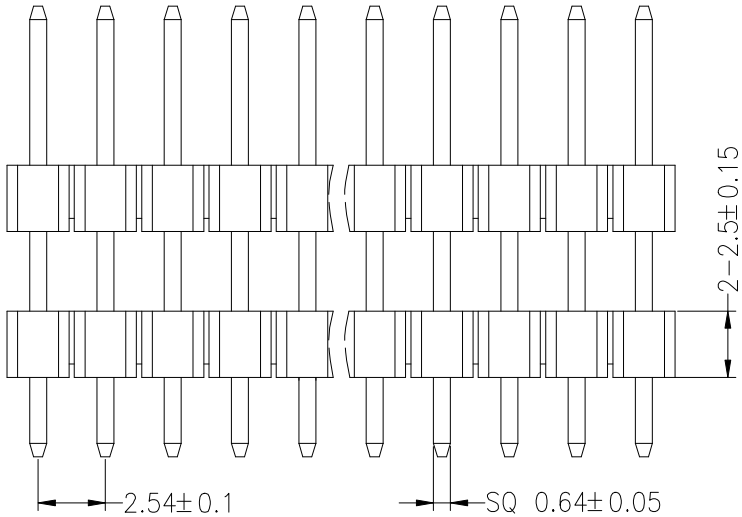

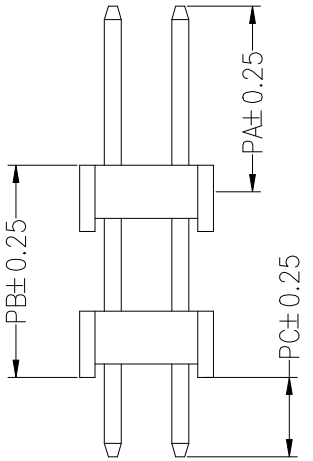

Dimension antitheses list			
ITEM	PA	PB	PC
Standard	XXX	XXX	XXX

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.09.02	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW: Liu Miao 21.09.02
CHECK:
APPROVE:

SCALE: FIT
UNIT: mm
SIZE: A4
SHEET: 1/1
PROJ.:

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO. 122522XXXNXXSXXXX0X
TITLE: 2.54PH Dual Row Double Plastic 180°