

HSF RoHS

FILE NO :E362810


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Soldering Temperature:260°C±5° 5S

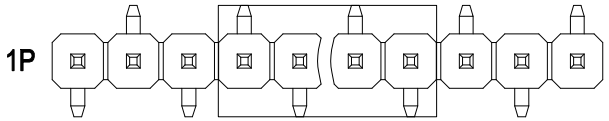


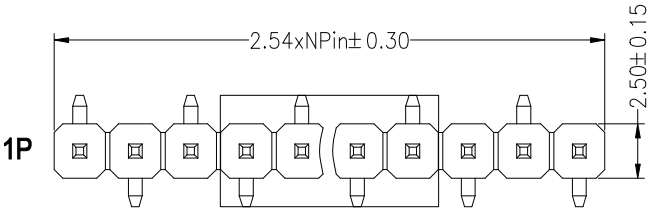



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

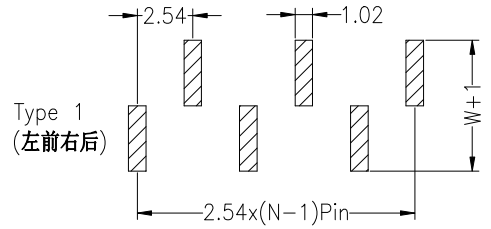

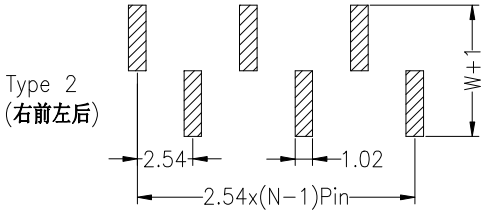

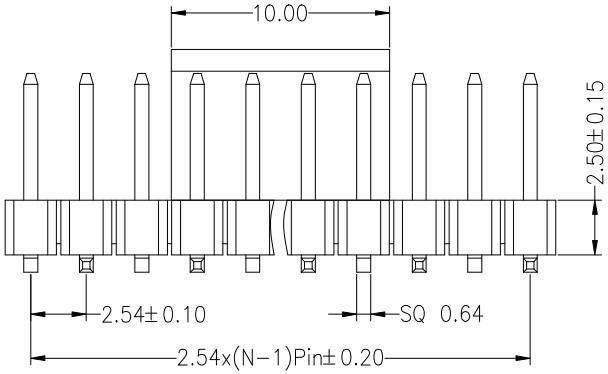



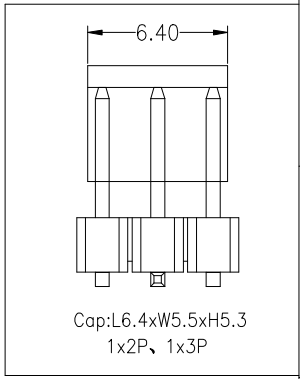

Ordering Information

1225 11 XX X N XX M XXX X XX

- 1225: Series
- 11: No.of Pins 2–40
- XX: Insulator Material
  - Option
  - C=BK−PA6T
  - E=BK−PA9T
  - F=BK−LCP
- X: Contact Plating
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- N
- XX: Pin Length
- M
- XXX: Packing
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
- X: Serial code
- XX

Dimension antitheses list			
ITEM	PA	PB	W
Standard	XXX	XXX	XXX

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.05.30	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	22.05.30
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	122511XXXNXXMXXXX0X
TITLE:	2.54mm Pin Header 2.5mm SMT